


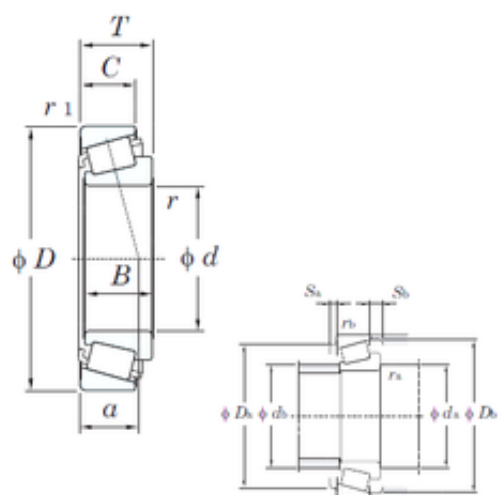

Bearing No. 33209JR

D	85 mm
d	45 mm
T	32 mm
B	32 mm
C	25 mm
a	21,8 mm
e	0.39
Cr	139
Cu	22.3
Y0	0.86
Y1	1.56
C0r	149
Bore	1.772 Inch 45 Millimeter
Noun	Bearing
a(mm)	21.8
Da min	72 mm
da max	52 mm
Weight	0,818 Kg
r min.	1,5 mm
r(min)	1.5
UNSPSC	31171516
Db(min)	81
db(max)	52
Da(max)	76.5
Da(min)	72
r1(min)	1.5
Sa(min)	5
Sb(min)	7
ra(max)	1.5

rb(max)	1.5
da(min)	53.5
ra max.	1,5 mm
Db min.	81 mm
Da max.	76,5 mm
da min.	53,5 mm
r2 min.	1,5 mm
rb max.	1,5 mm
Oil lub.	6200
Category	Tapered Roller Bearings Assembly
Size (mm)	45x85x32
Component	Assembly
Inventory	0.0
Width (mm)	32
Grease lub.	4600
Bearing No.	33209JR
Basic Number	33209
Weight / LBS	1.803
Inch - Metric	Metric
Product Group	B04334
Other Features	High Load Capacity
Keyword String	Tapered
Assembly Width	1.26 Inch 32 Millimeter
Bearing number	33209JR
Precision Class	Standard
(Refer.)Mass(kg)	0.818
Manufacturer URL	http://www.koyousa.com
Long Description	Assembly; Standard Precision; 45MM Bore; 85MM Outside Diameter; 32MM Assembly Width; Single Row of Rollers

Outside Diameter	3.346 Inch 85 Millimeter
Weight / Kilogram	0.82
Manufacturer Name	KOYO
Bore Diameter (mm)	45
Outer Diameter (mm)	85
Minimum Buy Quantity	N/A
Number of Tapered Rows	Single Row
Harmonized Tariff Code	8482.20.00.00
Calculation factor (e)	0,39
Flange Outside Diameter	0 Inch 0 Millimeter
(Oil) Lubrication Speed	6200 r/min
Calculation factor (Y0)	0,86
Manufacturer Item Number	33209JR
(Grease) Lubrication Speed	4600 r/min
Basic static load rating (C0)	149 kN
Basic dynamic load rating (C)	112 kN