


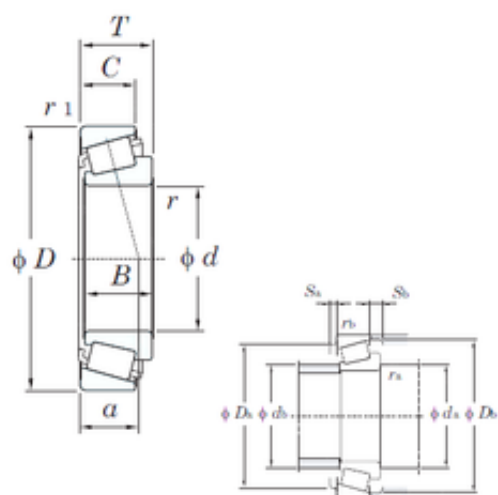

Bearing No. 33217JR

D	150 mm
d	85 mm
T	49 mm
B	49 mm
C	37 mm
a	37,1 mm
e	0.42
Cr	368
Cu	59.1
Y0	0.79
Y1	1.43
C0r	439
Bore	3.346 Inch 85 Millimeter
Noun	Bearing
a(mm)	37.1
Da min	128 mm
da max	95 mm
Weight	3,63 Kg
r min.	2,5 mm
r(min)	2.5
UNSPSC	31171516
Db(min)	144
db(max)	95
Da(max)	140
Da(min)	128
r1(min)	2
Sa(min)	7
Sb(min)	12
ra(max)	2

rb(max)	2
da(min)	97
ra max.	2 mm
Db min.	144 mm
Da max.	140 mm
da min.	97 mm
r2 min.	2 mm
rb max.	2 mm
Oil lub.	3400
Category	Tapered Roller Bearings Assembly
Size (mm)	85x150x49
Component	Assembly
Inventory	0.0
Width (mm)	49
Grease lub.	2500
Bearing No.	33217JR
Basic Number	33217
Weight / LBS	8.003
Inch - Metric	Metric
Product Group	B04334
Other Features	High Load Capacity
Keyword String	Tapered
Assembly Width	1.929 Inch 49 Millimeter
Bearing number	33217JR
Precision Class	Standard
(Refer.)Mass(kg)	3.63
Outside Diameter	5.906 Inch 150 Millimeter
Manufacturer URL	http://www.koyousa.com
Long Description	Assembly; Standard Precision; 85MM Bore; 150MM Outside

	Diameter; 49MM Assembly Width; Single Row of Rollers
Weight / Kilogram	3.63
Manufacturer Name	KOYO
Bore Diameter (mm)	85
Outer Diameter (mm)	150
Minimum Buy Quantity	N/A
Calculation factor (e)	0,42
Number of Tapered Rows	Single Row
Harmonized Tariff Code	8482.20.00.00
Flange Outside Diameter	0 Inch 0 Millimeter
(Oil) Lubrication Speed	3400 r/min
Calculation factor (Y0)	0,79
Manufacturer Item Number	33217JR
(Grease) Lubrication Speed	2500 r/min
Basic static load rating (C0)	439 kN
Basic dynamic load rating (C)	294 kN