


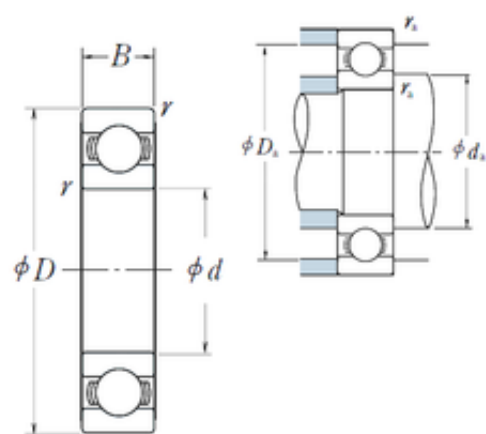

Bearing No. 62/32

r	1
d	32 mm
D	65 mm
B	17 mm
C	17 mm
fo	13.6
C0	11.6
ra	1
B_	17
Z_	8
D_	65
SRI	5.21
DA_	10.319
SRE	5.47
DE_	58.819
DI_	38.181
D_a	60
mass	0.225
SREN	0
SRIN	0
Bore	1.26 Inch 32 Millimeter
bomp	0
Noun	Bearing
yobi	62/32
SRIX	0.025
SDM_	48.5
SREX	0.05
KBRG	6101
SBRG	2
C_conv	20700

ALPHA_	0
Weight	0,225 Kg
da max	40 mm
r min.	1 mm
da min	37
UNSPSC	31171504
LangID	1
hidYobi	62/32
GRS rpm	10000
Oil rpm	12000
Da max.	60 mm
ra max.	1 mm
da min.	37 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Size (mm)	32x65x17
Snap Ring	No
Enclosure	Open
Inventory	0.0
Width (mm)	17
Prod_Type3	DGBB_SR_OT
Weight / LBS	0.4961
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Bearing number	62/32
Keyword String	Ball
Other Features	Deep Groove
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Outside Diameter	2.559 Inch 65 Millimeter
Long Description	32MM Bore; 65MM

	Outside Diameter; 17MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Outer Race Width	0.669 Inch 17 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Manufacturer URL	http://www.nskamericas.com
Manufacturer Name	NSK
Weight / Kilogram	0.221
Internal Clearance	C0-Medium
Bore Diameter (mm)	32
Outer Diameter (mm)	65
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	12 000 r/min
Internal Special Features	No
(Grease) Lubrication Speed	10 000 r/min
Basic static load rating (C0)	11,6 kN
Basic dynamic load rating (C)	20,7 kN
Maximum Capacity / Filling Slot	No