


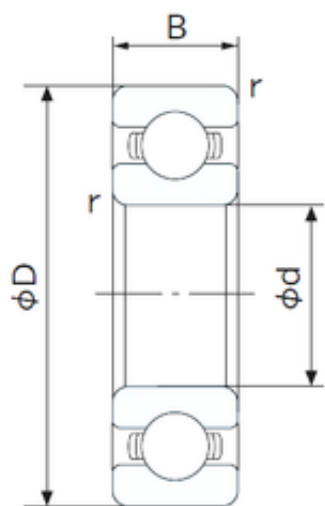

Bearing No. 62/32

D	65 mm
d	32 mm
B	17 mm
C	17 mm
Noun	Bearing
Bore	1.26 Inch 32 Millimeter
Width	17 mm
UNSPSC	31171504
r min.	1 mm
Weight	0.230 Kg
da min.	38 mm
Da max.	59 mm
ra max.	1.0 mm
Category	Single Row Ball Bearing
ra (max)	1 mm
da (min)	38 mm
Da (max)	59 mm
Bore Size	32 mm
Factor fo	13.6
Inventory	0.0
Bore Type	Cylindrical Bore
Enclosure	Open
Snap Ring	No
Size (mm)	32x65x17
Width (mm)	17
Inch - Metric	Metric
Configuration	Single Row
Product Group	B00308
Cage Material	Steel
Keyword String	Ball

Other Features	Deep Groove
Bearing number	62/32
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Long Description	32MM Bore; 65MM Outside Diameter; 17MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Outer Race Width	0.669 Inch 17 Millimeter
Radial Clearance	0.006 to 0.020 mm
Inner Race Width	0 Inch 0 Millimeter
Manufacturer URL	http://www.nachiamerica.com
Outside Diameter	2.559 Inch 65 Millimeter
Manufacturer Name	NACHI
Weight / Kilogram	0
Internal Clearance	C0-Medium
Static Load Rating	13,100 N
Bore Diameter (mm)	32
Dynamic Load Rating	22,400 N
Outer Diameter (mm)	65
Minimum Buy Quantity	N/A
Limiting Speed - Oil	12,000 rpm
Fillet Radius/Chamfer	1 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	11,000 rpm
Internal Special Features	No

(Grease) Lubrication Speed	9500 r/min
Basic static load rating (C0)	13,1 kN
Basic dynamic load rating (C)	22,4 kN
Maximum Capacity / Filling Slot	No