


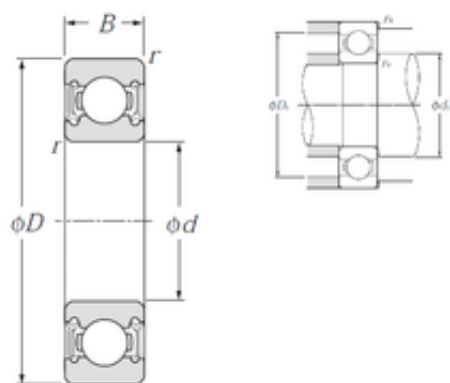

Bearing No. 62/32LLU

C	17 mm
d	32 mm
D	65 mm
B	17 mm
Bore	1.26 Inch 32 Millimeter
Noun	Bearing
Weight	0,226 Kg
r min.	1 mm
da max	40 mm
UNSPSC	31171504
da min.	37 mm
Da max.	60 mm
ra max.	1 mm
Category	Single Row Ball Bearing
Size (mm)	32x65x17
Snap Ring	No
Inventory	1.0
Enclosure	2 Seals
Width (mm)	17
bore type:	Round
Weight / LBS	0.496
Inch - Metric	Metric
closure type:	Double Sealed
Product Group	B00308
Cage Material	Steel
bore diameter:	32 mm
Keyword String	Ball
overall width:	17 mm
cage material:	Steel
fillet radius:	1 mm

Other Features	Deep Groove
Bearing number	62/32LLU
Enclosure Type	Contact Seal
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Reference speed	7 100 r/min
Outer Race Width	0.669 Inch 17 Millimeter
Long Description	32MM Bore; 65MM Outside Diameter; 17MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	2.559 Inch 65 Millimeter
Inner Race Width	0 Inch 0 Millimeter
outside diameter:	65 mm
Manufacturer Name	NTN
precision rating:	ISO Class 0
bearing material:	High Carbon Chrome Steel
inner ring width:	17 mm
outer ring width:	17 mm
Weight / Kilogram	0
Bore Diameter (mm)	32
Internal Clearance	C0-Medium
Outer Diameter (mm)	65
snap ring included:	Without Snap Ring

internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	11600 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	7100 rpm
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	20700 N
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	11,6 kN
Basic dynamic load rating (C)	20,7 kN
Maximum Capacity / Filling Slot	No