


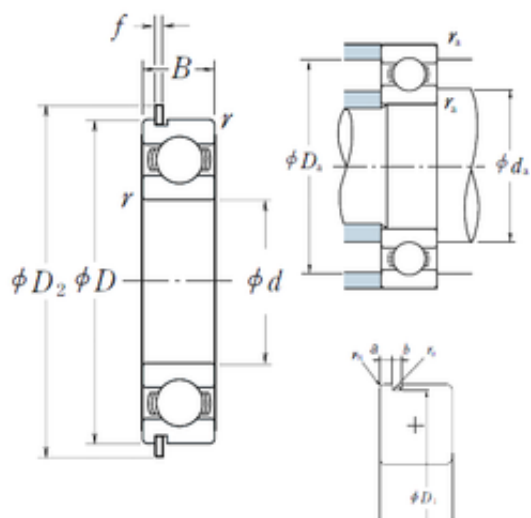

Bearing No. 62/32NR

f	1,7 mm
r	1
d	32 mm
D	65 mm
B	17 mm
C	17 mm
a	3,28 mm
b	1,9 mm
D1	62,6 mm
fo	13.6
C0	11.6
ra	1
D2	70,7 mm
Cy	4.6
ro	0.6
Dx	71.5
rn	0,5 mm
D_	65
B_	17
Z_	8
SRI	5.21
D_a	60
DE_	58.819
SRE	5.47
DA_	10.319
DI_	38.181
Noun	Bearing
SDM_	48.5
Bore	1.26 Inch 32 Millimeter
SRIX	0.025

SRIN	0
SREX	0.05
SREN	0
KBRG	6101
bomp	0
mass	0.225
yobi	62/32NR
SBRG	2
da min	37
Weight	0,225 Kg
UNSPSC	31171504
r min.	1 mm
ALPHA_	0
da max	40 mm
LangID	1
C_conv	20700
hidYobi	62/32NR
ra max.	1 mm
Da max.	60 mm
Oil rpm	12000
da min.	37 mm
GRS rpm	10000
r0 max.	0,6 mm
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Inventory	0.0
Size (mm)	32x65x17
Snap Ring	Yes
Enclosure	Open
Width (mm)	17
Prod_Type3	DGBB_SR_NR_OT
Weight / LBS	0.4961

Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Bearing number	62/32NR
Other Features	Deep Groove With Snap Ring
Keyword String	Ball
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.669 Inch 17 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Long Description	32MM Bore; 65MM Outside Diameter; 17MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	2.559 Inch 65 Millimeter
Weight / Kilogram	0.22
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	32
Outer Diameter (mm)	65
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	12 000 r/min
Internal Special Features	No

(Grease) Lubrication Speed	10 000 r/min
Basic static load rating (C0)	11,6 kN
Basic dynamic load rating (C)	20,7 kN
Maximum Capacity / Filling Slot	No