


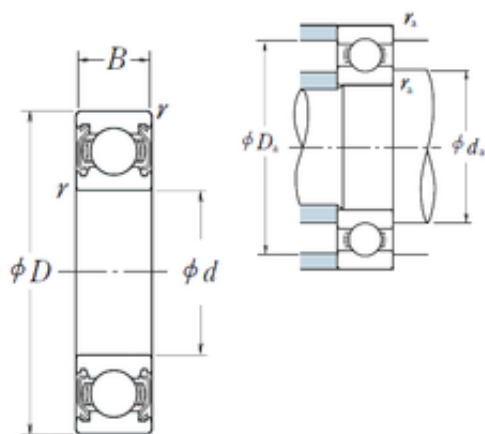

Bearing No. 62/32ZZ

D	65 mm
d	32 mm
B	17 mm
C	17 mm
r	1
Z_	8
B_	17
D_	65
ra	1
C0	11.6
fo	13.6
DI_	38.181
SRI	5.21
D_a	60
DE_	58.819
DA_	10.319
SRE	5.47
SRIN	0
SBRG	2
yobi	62/32ZZ
SDM_	48.5
SREX	0.05
KBRG	6141
bomp	0
mass	0.225
Bore	1.26 Inch 32 Millimeter
SRIX	0.025
SREN	0
Noun	Bearing
ALPHA_	0

da min	37
LangID	1
r min.	1 mm
UNSPSC	31171504
da max	40 mm
C_conv	20700
Weight	0,225 Kg
ra max.	1 mm
hidYobi	62/32ZZ
GRS rpm	10000
Da max.	60 mm
da min.	37 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Snap Ring	No
Size (mm)	32x65x17
Enclosure	2 Metal Shields
Inventory	0.0
Width (mm)	17
Prod_Type3	DGBB_SR_ZZ
Weight / LBS	0.4961
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
Bearing number	62/32ZZ
Keyword String	Ball
Other Features	Deep Groove
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outside Diameter	2.559 Inch 65 Millimeter
Outer Race Width	0.669 Inch 17 Millimeter

Long Description	32MM Bore; 65MM Outside Diameter; 17MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Stee
Manufacturer URL	http://www.nskamericas.com
Inner Race Width	0 Inch 0 Millimeter
Weight / Kilogram	0
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	32
Outer Diameter (mm)	65
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	No
(Grease) Lubrication Speed	10 000 r/min
Basic static load rating (C0)	11,6 kN
Basic dynamic load rating (C)	20,7 kN
Maximum Capacity / Filling Slot	No