


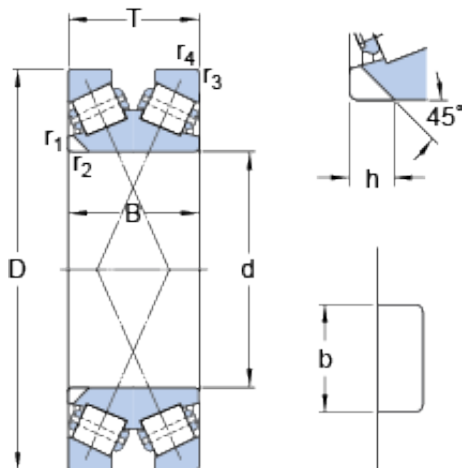

Bearing No. 332394

h	50 mm
d	800 mm
D	1100 mm
T	300 mm
B	300 mm
b	75.9 mm
Size (mm)	1100x800x300
Width (mm)	300
Mass bearing	850 kg
Bearing number	332394
Thrust factor K	0.75
Thrust factor - K	0.75
Bore Diameter (mm)	1100
Outer Diameter (mm)	800
Calculation factor e	0.79
$r_{3,4}$ min.	6 mm
$r_{1,2}$ min.	1.5 mm
d_1 ?	867 mm
D_1 ?	960 mm
$r_{3,4}$ - min.	6 mm
Design variant/feature	TDIS.1/NY
$r_{1,2}$ - min.	1.5 mm
Calculation factor - e	0.79
Basic dynamic load rating C	7650 kN
Basic dynamic load rating - C	7650 kN
Calculation factor Y_0	0.8
Calculation factor Y_2	1.25
Calculation factor Y_1	0.85
Fatigue load limit P_u	1340 kN

Calculation factor - Y_0	0.8
Calculation factor - Y_2	1.25
Fatigue load limit - P_u	1340 kN
Calculation factor - Y_1	0.85
Basic static load rating C_0	21600 kN
Basic static load rating - C_0	21600 kN
Comparative radial load rating C_F	1860 kN
Comparative axial load rating C_{Fa}	1440 kN
Comparative radial load rating - C_F	1860 kN
Comparative axial load rating - C_{Fa}	1440 kN