


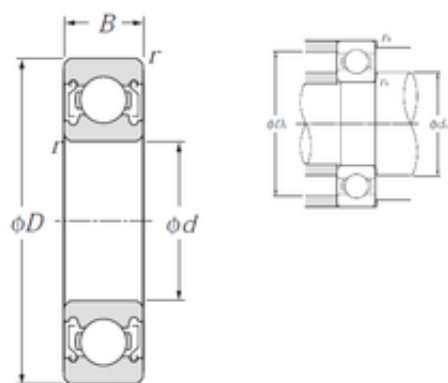

Bearing No. 62/32ZZ

D	65 mm
d	32 mm
B	17 mm
C	17 mm
rn	0,5 mm
Bore	1.26 Inch 32 Millimeter
Noun	Bearing
Weight	0,226 Kg
r min.	1 mm
UNSPSC	31171504
da max	40 mm
da min.	37 mm
Da max.	60 mm
ra max.	1 mm
series:	62
Category	Single Row Ball Bearing
Enclosure	2 Metal Shields
Size (mm)	32x65x17
Inventory	0.0
Snap Ring	No
Width (mm)	17
bore type:	Round
maximum rpm:	11000 RPM
Weight / LBS	0.498
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
closure type:	Double Shielded
bore diameter:	32 mm
Keyword String	Ball

overall width:	17 mm
cage material:	Steel
fillet radius:	1 mm
Bearing number	62/32ZZ
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Long Description	32MM Bore; 65MM Outside Diameter; 17MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.ntnamerica.com
Outer Race Width	0.669 Inch 17 Millimeter
Outside Diameter	2.559 Inch 65 Millimeter
outside diameter:	65 mm
outer ring width:	17 mm
inner ring width:	17 mm
Manufacturer Name	NTN
bearing material:	High Carbon Chrome Steel
Weight / Kilogram	0.225
precision rating:	ISO Class 0
Internal Clearance	C0-Medium
Bore Diameter (mm)	32
Outer Diameter (mm)	65
internal clearance:	CN
snap ring included:	Without Snap Ring
Minimum Buy Quantity	N/A

maximum rpm (grease):	11000 rpm
static load capacity:	11600 N
row type & fill slot:	Single Row Non-Fill Slot
dynamic load capacity:	20700 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	62/32ZZ/2A
Internal Special Features	No
(Grease) Lubrication Speed	11 000 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic dynamic load rating (C)	20,7 kN
Basic static load rating (C0)	11,6 kN
Maximum Capacity / Filling Slot	No