


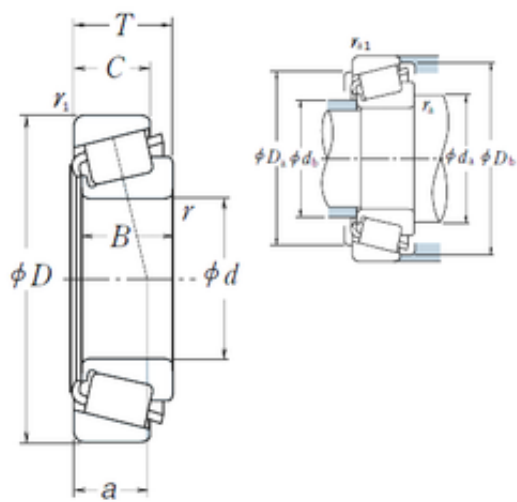

Bearing No. 33275/33462

e	0.44
d	69,85 mm
D	117,475 mm
T	30,162 mm
B	30,162 mm
C	23,812 mm
a	26,8 mm
Da	104 mm
B_	30.162
Db	112 mm
da	84 mm
Y0	0.76
db	77 mm
C0	179
D_	117.475
Z_	23
C_	23.812
Y1	1.4
DE_	103.543
SLR	21.3
D_a	104
DI_	83.603
DA1	10.836
DA2	9.663
CUP	0.442
DA_	10.252
D_b	112
RAr	196.091
SDM_	93.592
KBRG	3161

yobi	33275/33462
CONE	0.83
ALP21	32
ALP22	24
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	10
r min.	3,5 mm
LangID	1
Weight	1,272 Kg
ALPHA_	16.2
r1 min.	3,3 mm
ra max.	3,5 mm
Oil rpm	4000
outer r	3.3
hidYobi	33275/33462
GRS rpm	3000
inner r	3.5
hidTable	ecat_NSTPRI
inner ra	3.5
outer rb	3.3
ra1 max.	3,3 mm
Size (mm)	69.85x117.475x30.162
SHOG_yobi	33275R/33462R
Prod_Type3	TRBSR_ID_A
Width (mm)	30,162
Bearing number	33275/33462
Bore Diameter (mm)	69,85
Outer Diameter (mm)	117,475
Calculation factor (e)	0,44

(Oil) Lubrication Speed	4000 r/min
Calculation factor (Y0)	0,76
(Grease) Lubrication Speed	3000 r/min
Basic static load rating (C0)	179 kN
Basic dynamic load rating (C)	119 kN