


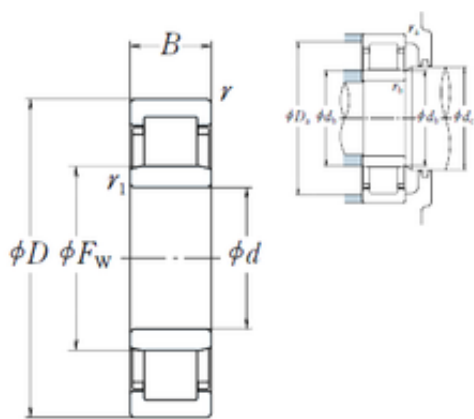

Bearing No. NU1088

d	440 mm
D	650 mm
B	94 mm
C	94 mm
r	6
C0	2530
r1	6
ra	5
Fw	493 mm
rb	5
Z_	26
B_	94
D_	650
DI_	493
DA_	52
DE_	597
yobi	NU1088
mass	105
KBRG	4144
SBRG	10
SDM_	545
ALPHA_	0
C_conv	1470000
LangID	1
Weight	105 Kg
db min	466
dc min	498
r min.	6 mm
db max	488
D_a max	624

Oil rpm	1000
TSR rpm	1000
GRS rpm	800
hidYobi	NU1088
rb max.	5 mm
ra max.	5 mm
r1 min.	6 mm
hidTable	ecat_NSCLDR
Size (mm)	440x650x94
Prod_Type3	CRB_SR_NU
Width (mm)	94
Bearing number	NU1088
Bore Diameter (mm)	440
Outer Diameter (mm)	650
(Grease) Lubrication Speed	800 r/min
Basic static load rating (C0)	2530 kN
Basic dynamic load rating (C)	1470 kN