


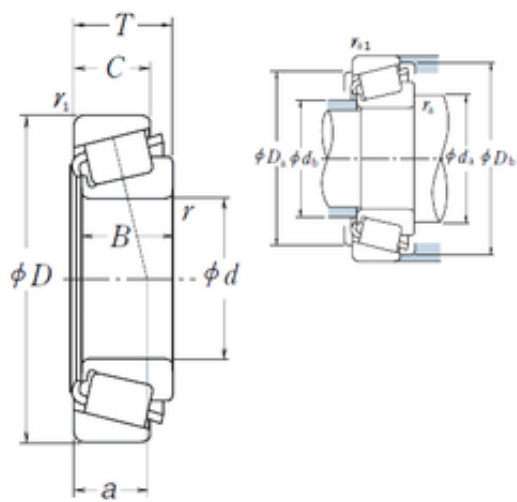

Bearing No. 336/332

e	0.27
d	41,275 mm
D	80 mm
T	21 mm
B	22,403 mm
C	17,826 mm
a	14,5 mm
Da	73 mm
B_	22.403
Db	75 mm
da	47 mm
Y0	1.2
db	46 mm
C0	75.5
D_	80
Z_	15
C_	17.826
Y1	2.2
DE_	71.15
SLR	14.7
D_a	73
DI_	50.399
DA1	10.724
DA2	9.958
CUP	0.146
DA_	10.343
D_b	75
RAr	204.846
SDM_	60.655
KBRG	3161

yobi	336/332
CONE	0.325
ALP21	20
ALP22	40
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	0
r min.	0,8 mm
LangID	1
Weight	0,471 Kg
ALPHA_	10.333
r1 min.	1,3 mm
ra max.	0,8 mm
Oil rpm	6300
outer r	1.3
hidYobi	336/332
GRS rpm	4500
inner r	0.8
hidTable	ecat_NSTPRI
inner ra	0.8
outer rb	1.3
ra1 max.	1,3 mm
Size (mm)	41.275x80x21
SHOG_yobi	336R/332R
Prod_Type3	TRBSR_ID_A
Width (mm)	21
Bearing number	336/332
Bore Diameter (mm)	41,275
Outer Diameter (mm)	80
Calculation factor (e)	0,27

(Oil) Lubrication Speed	6300 r/min
Calculation factor (Y0)	1,2
(Grease) Lubrication Speed	4500 r/min
Basic static load rating (C0)	75,5 kN
Basic dynamic load rating (C)	68,5 kN