


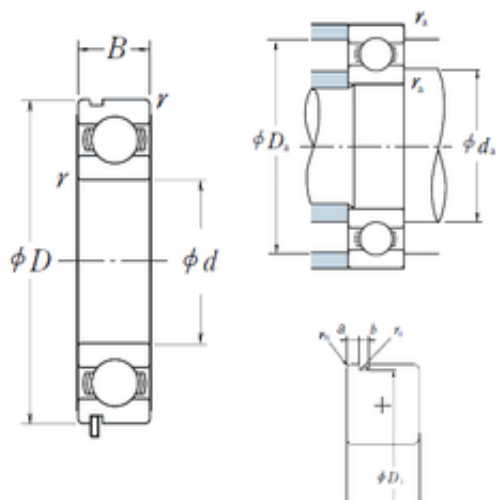

Bearing No. 6200N

a	2,06 mm
r	0.6
d	10 mm
D	30 mm
B	9 mm
C	9 mm
b	1,35 mm
fo	13.2
B_	9
ra	0.6
C0	2.39
D1	28,17 mm
D_	30
Z_	8
rn	0,5 mm
ro	0.4
DE_	25.262
SRI	2.46
D_a	26
DA_	4.762
SRE	2.52
DI_	15.738
yobi	6200N
mass	0.032
SBRG	2
bomp	0
KBRG	6101
SREX	0.03
SREN	0
SRIN	-0.015

SDM_	20.5
SRIX	0.015
ALPHA_	0
r min.	0,6 mm
C_conv	5100
da max	16 mm
da min	14
Weight	0,032 Kg
LangID	1
ra max.	0,6 mm
Da max.	26 mm
Oil rpm	30000
da min.	14 mm
r0 max.	0,4 mm
hidYobi	6200N
GRS rpm	24000
hidTable	ecat_NSRDGB
Size (mm)	10x30x9
Prod_Type3	DGBB_SR_N_OT
Width (mm)	9
Bearing number	6200N
Bore Diameter (mm)	10
Outer Diameter (mm)	30
(Oil) Lubrication Speed	30 000 r/min
(Grease) Lubrication Speed	24 000 r/min
Basic dynamic load rating (C)	5,1 kN
Basic static load rating (C0)	2,39 kN