


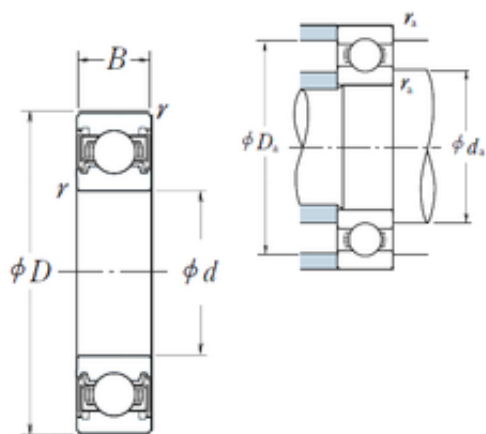

Bearing No. 6200VV

D	30 mm
d	10 mm
B	9 mm
C	9 mm
r	0.6
Z_	8
B_	9
D_	30
ra	0.6
C0	2.39
fo	13.2
DI_	15.738
SRI	2.46
D_a	26
DE_	25.262
DA_	4.762
SRE	2.52
SRIN	-0.015
SBRG	2
yobi	6200VV
SDM_	20.5
SREX	0.03
KBRG	6151
bomp	0
mass	0.032
Bore	0.394 Inch 10 Millimeter
SRIX	0.015
SREN	0
Noun	Bearing

ALPHA_	0
da min	14
LangID	1
r min.	0,6 mm
UNSPSC	31171504
da max	16 mm
C_conv	5100
Weight	0,032 Kg
ra max.	0,6 mm
hidYobi	6200VV
GRS rpm	24000
da min.	14 mm
Da max.	26 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Snap Ring	No
Size (mm)	10x30x9
Enclosure	2 Seals
Inventory	0.0
Width (mm)	9
Prod_Type3	DGBB_SR_VV
Weight / LBS	0.029
Cage Material	Steel
Product Group	B00308
Inch - Metric	Metric
Bearing number	6200VV
Keyword String	Ball
Enclosure Type	Non-Contact Seal
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outside Diameter	1.181 Inch 30 Millimeter
Outer Race Width	0.354 Inch 9 Millimeter

Long Description	10MM Bore; 30MM Outside Diameter; 9MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Weight / Kilogram	0.01
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	10
Outer Diameter (mm)	30
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6200VV
Internal Special Features	No
(Grease) Lubrication Speed	24 000 r/min
Basic static load rating (C0)	2,39 kN
Basic dynamic load rating (C)	5,1 kN
Maximum Capacity / Filling Slot	No