


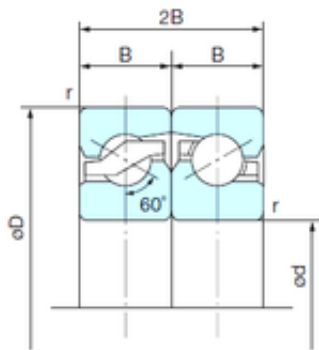

Bearing No. 25TAB06DF

D	62 mm
d	25 mm
B	15 mm
C	15 mm
r1	0.6 mm
2B	30 mm
Width	15 mm
r min.	1 mm
Weight	0.24 Kg
r1 min.	0.6 mm
Da2 (max)	53.4 mm
Enclosure	Open
Da1 (max)	46 mm
da2 (min)	39.7 mm
da1 (min)	46.2 mm
Bore Size	25 mm
Bore Type	Cylindrical Bore
Size (mm)	25x62x15
Width (mm)	15
Configuration	Double Row
Bearing number	25TAB06DF
Angle (?)	60 °
Outside Diameter	62 mm
Static Load Rating	46,400 N
Bore Diameter (mm)	25
Dynamic Load Rating	29,900 N
Outer Diameter (mm)	62
Limiting Speed - Oil	6,000 rpm
Fillet Radius/Chamfer	1 mm
Limiting Speed - Grease	4,650 rpm

Basic static load rating (C0)	46,4 kN
Basic dynamic load rating (C)	29,9 kN
Starting Torque - Grease Lubrication	20 N·cm