


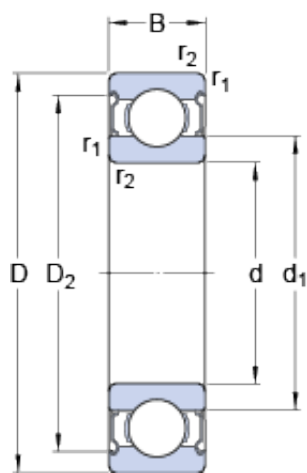

Bearing No. 6201-2Z/VA201

D	32 mm
d	12 mm
B	10 mm
Bore	0.472 Inch 12 Millimeter
Noun	Bearing
UNSPSC	31171504
Category	Single Row Ball Bearing
Inventory	0.0
Enclosure	2 Metal Shields
Size (mm)	32x12x10
Snap Ring	No
Width (mm)	10
Mass bearing	0.039 kg
Weight / LBS	0.039
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
D ₂	27.34 mm
d ₁	18.45 mm
Other Features	Deep Groove Extreme Temperature Variant
Keyword String	Ball
Bearing number	6201-2Z/VA201
Limiting speed	200 r/min
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Manufacturer URL	http://www.skf.com
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.394 Inch 10 Millimeter

Long Description	12MM Bore; 32MM Outside Diameter; 10MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; Polyalkylene Glycol/Graphite Mixture Filled Internal Special Fea
Outside Diameter	1.26 Inch 32 Millimeter
Weight / Kilogram	0.049
Manufacturer Name	SKF
d _a min.	16.2 mm
Internal Clearance	C0-Medium
d _a max.	18.4 mm
D _a max.	27.8 mm
r _a max.	0.6 mm
Bore Diameter (mm)	32
Outer Diameter (mm)	12
r _{1,2} min.	0.6 mm
Minimum Buy Quantity	N/A
d _a - min.	16.2 mm
d _a - max.	18.4 mm
D _a - max.	27.8 mm
r _a - max.	0.6 mm
d ₁ ?	18.45 mm
D ₂ ?	27.34 mm
Harmonized Tariff Code	8482.10.50.68
r _{1,2} - min.	0.6 mm
Limiting temperature - T	250 °C
Internal Special Features	Polyalkylene Glycol/Graphite Mixture Filled
Basic dynamic load	7.28 kN

rating C	
Limiting temperature T max.	250 °C
Basic dynamic load rating - C	7.3 kN
Maximum Capacity / Filling Slot	No
Basic static load rating C ₀	3.1 kN
Basic static load rating - C ₀	3.1 kN