


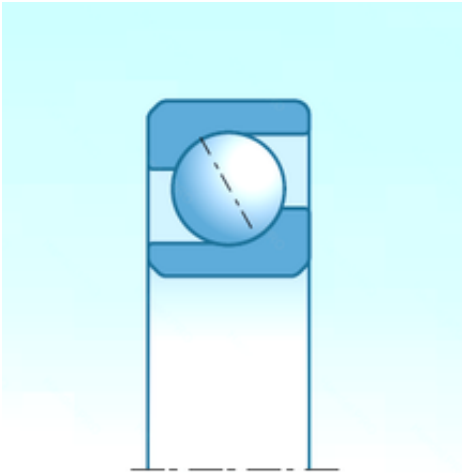

Bearing No. 7906CG/GNP4

D	47 mm
d	30 mm
B	9 mm
C	9 mm
Noun	Bearing
Bore	1.181 Inch 30 Millimeter
Width	0.354 Inch 9 Millimeter
UNSPSC	31171531
weight:	0.048 kg
Preload	Light
series:	79
Category	Precision Ball Bearings
Size (mm)	30x47x9
Enclosure	Open
Inventory	0.0
bore type:	Round
Width (mm)	9
maximum rpm:	28000 rpm
Weight / LBS	0.529
Flush Ground	Yes
Cage Material	Nylon
Inch - Metric	Metric
closure type:	Open
Contact Angle	15 Degree
Raceway Style	1 Rib Outer Ring
Product Group	B04270
Keyword String	Angular Contact Ball
overall width:	9 mm
bore diameter:	30 mm

contact angle:	15 °
cage material:	Nylon
Bearing number	7906CG/GNP4
Other Features	Single Row Angular Contact
fillet radius:	0.3 mm
Material - Ball	Steel
finish/coating:	Uncoated
Angle (?)	15 °
Rolling Element	Ball Bearing
Precision Class	ABEC 7 ISO P4
Manufacturer URL	http://www.ntnamerica.com
Long Description	30MM Bore; 47MM Outside Diameter; 9MM Width; Open Enclosure; ABEC 7 ISO P4 Precision; Steel Ball Material; 1 (Single) Bearings; 15 Degree Contact Angle; Nylon Cage Material; 1 Rib Outer Ring Raceway
Outside Diameter	1.85 Inch 47 Millimeter
bearing material:	High Carbon Chrome Steel
outside diameter:	47 mm
Manufacturer Name	NTN
outer ring width:	9 mm
precision rating:	ISO Class 4
Weight / Kilogram	0.24
Number of Bearings	1 (Single)
Bore Diameter (mm)	30
internal clearance:	C0
snap ring included:	Without Snap Ring
Outer Diameter (mm)	47

Minimum Buy Quantity	N/A
Mounting Arrangement	Universal
row type & fill slot:	Single-Row Non-Fill Slot
Harmonized Tariff Code	8482.10.50.28
Manufacturer Item Number	7906CG/GNP4
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
radial static load capacity:	6250 N
radial dynamic load capacity:	8300 N