


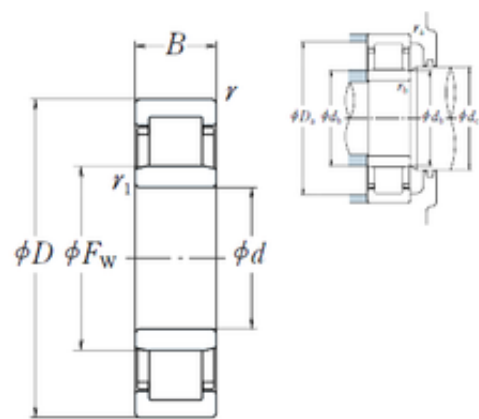

Bearing No. NU1024

|        |         |
|--------|---------|
| C      | 28 mm   |
| r      | 2       |
| d      | 120 mm  |
| D      | 180 mm  |
| B      | 28 mm   |
| ra     | 2       |
| C0     | 191     |
| da     | 129     |
| Z_     | 24      |
| rb     | 1       |
| D_     | 180     |
| Ew     | 165 mm  |
| Fw     | 135 mm  |
| r1     | 1.1     |
| B_     | 28      |
| DA_    | 15      |
| DE_    | 165     |
| DI_    | 135     |
| SBRG   | 10      |
| KBRG   | 4144    |
| mass   | 2.43    |
| SDM_   | 150     |
| yobi   | NU1024  |
| dc min | 138     |
| db min | 126.5   |
| r min. | 2 mm    |
| ALPHA_ | 0       |
| db max | 133     |
| C_conv | 139000  |
| Weight | 2,43 Kg |
|        |         |

|                               |             |
|-------------------------------|-------------|
| LangID                        | 1           |
| hidYobi                       | NU1024      |
| r1 min.                       | 1,1 mm      |
| D_a max                       | 171         |
| ra max.                       | 2 mm        |
| da min.                       | 129 mm      |
| rb max.                       | 1 mm        |
| TSR rpm                       | 4000        |
| GRS rpm                       | 3400        |
| Oil rpm                       | 4300        |
| hidTable                      | ecat_NSCLDR |
| Prod_Type3                    | CRB_SR_NU   |
| Bearing number                | NU1024      |
| Bore Diameter (mm)            | 120         |
| Outer Diameter (mm)           | 165         |
| (Grease) Lubrication Speed    | 3 400 r/min |
| Basic dynamic load rating (C) | 139 kN      |
| Basic static load rating (C0) | 191 kN      |