


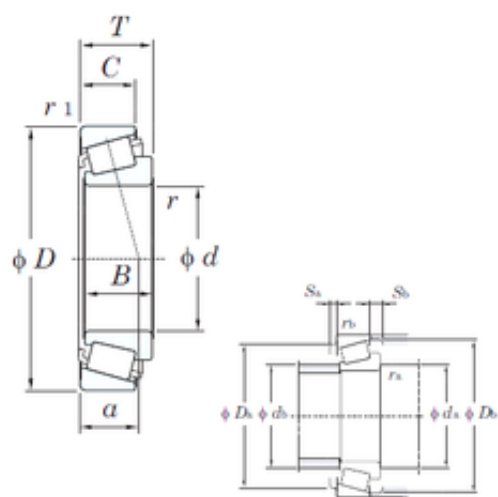

Bearing No. 342/332

|           |              |
|-----------|--------------|
| C         | 17,826 mm    |
| a         | 15,1 mm      |
| e         | 0.27         |
| d         | 41,275 mm    |
| D         | 80 mm        |
| T         | 21 mm        |
| B         | 22,403 mm    |
| db        | 46.0         |
| da        | 53.0         |
| Cr        | 85.0         |
| Da        | 73 mm        |
| Db        | 75 mm        |
| Cu        | 11.4         |
| Y1        | 2.20         |
| Y0        | 1.21         |
| C0r       | 74.8         |
| a(mm)     | 15.1         |
| Weight    | 0,461 Kg     |
| r(min)    | 3.6          |
| db min    | 46 mm        |
| r min.    | 3,6 mm       |
| ra max.   | 3,6 mm       |
| r1(min)   | 1.2          |
| rb(max)   | 1.2          |
| ra(max)   | 3.6          |
| da min.   | 53 mm        |
| r2 min.   | 1,2 mm       |
| rb max.   | 1,2 mm       |
| Oil lub.  | 6600         |
| Size (mm) | 41.275x80x21 |
|           |              |

|                               |            |
|-------------------------------|------------|
| Width (mm)                    | 21         |
| Bearing No.                   | 342/332    |
| Grease lub.                   | 4900       |
| Bearing number                | 342/332    |
| (Refer.)Mass(kg)              | 0.459      |
| Bore Diameter (mm)            | 41,275     |
| Outer Diameter (mm)           | 80         |
| Calculation factor (e)        | 0,27       |
| Calculation factor (Y0)       | 1,21       |
| (Oil) Lubrication Speed       | 6600 r/min |
| (Grease) Lubrication Speed    | 4900 r/min |
| Basic dynamic load rating (C) | 68 kN      |
| Basic static load rating (C0) | 74,8 kN    |