


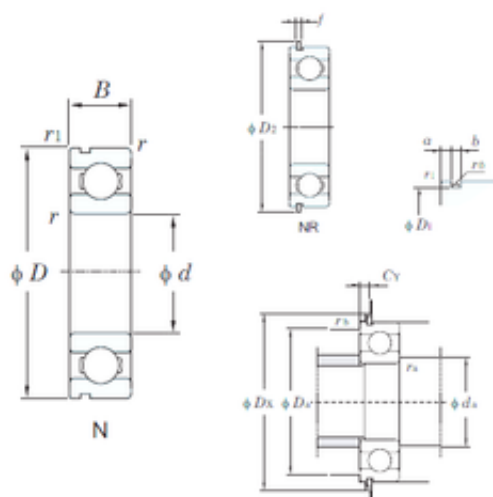

Bearing No. 6201N

|                               |             |
|-------------------------------|-------------|
| C                             | 10 mm       |
| a                             | 2,06 mm     |
| f                             | 1,07 mm     |
| b                             | 1,5 mm      |
| d                             | 12 mm       |
| D                             | 32 mm       |
| B                             | 10 mm       |
| D1                            | 30,15 mm    |
| D2                            | 36,7 mm     |
| Weight                        | 0,037 Kg    |
| r min.                        | 0,6 mm      |
| da min.                       | 16 mm       |
| Da max.                       | 28 mm       |
| r0 max.                       | 0,4 mm      |
| r1 min.                       | 0,3 mm      |
| Size (mm)                     | 12x32x10    |
| Width (mm)                    | 10          |
| Bearing number                | 6201N       |
| Bore Diameter (mm)            | 12          |
| Outer Diameter (mm)           | 32          |
| (Oil) Lubrication Speed       | 27000 r/min |
| (Grease) Lubrication Speed    | 22000 r/min |
| Basic dynamic load rating (C) | 6,8 kN      |
| Basic static load rating (C0) | 3,05 kN     |