


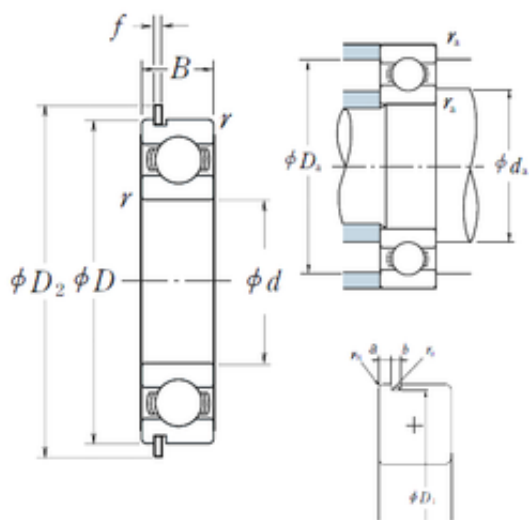

Bearing No. 6201NR

f	1,12 mm
r	0.6
d	12 mm
D	32 mm
B	10 mm
C	10 mm
a	2,06 mm
b	1,35 mm
D1	30,15 mm
fo	12.3
C0	3.05
ra	0.6
D2	36,7 mm
Cy	2.9
ro	0.4
Dx	37.5
rn	0,5 mm
D_	32
B_	10
Z_	7
SRI	3.01
D_a	28
DE_	27.953
SRE	3.16
DA_	5.953
DI_	16.047
Noun	Bearing
SDM_	22
Bore	0.472 Inch 12 Millimeter

SRIX	0.015
SRIN	0
SREX	0.03
SREN	0
KBRG	6101
bomp	0
mass	0.037
yobi	6201NR
SBRG	2
da min	16
Weight	0,037 Kg
UNSPSC	31171504
r min.	0,6 mm
ALPHA_	0
da max	17 mm
LangID	1
C_conv	6800
hidYobi	6201NR
ra max.	0,6 mm
Da max.	28 mm
Oil rpm	28000
da min.	16 mm
GRS rpm	22000
r0 max.	0,4 mm
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Inventory	0.0
Size (mm)	12x32x10
Snap Ring	Yes
Enclosure	Open
Width (mm)	10
Prod_Type3	DGBB_SR_NR_OT

Weight / LBS	0.0816
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Bearing number	6201NR
Other Features	Deep Groove With Snap Ring
Keyword String	Ball
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outside Diameter	1.26 Inch 32 Millimeter
Outer Race Width	0.394 Inch 10 Millimeter
Long Description	12MM Bore; 32MM Outside Diameter; 10MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Manufacturer URL	http://www.nskamericas.com
Inner Race Width	0 Inch 0 Millimeter
Weight / Kilogram	0.037
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	12
Outer Diameter (mm)	32
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	28 000 r/min
Internal Special Features	No

(Grease) Lubrication Speed	22 000 r/min
Basic static load rating (C0)	3,05 kN
Basic dynamic load rating (C)	6,8 kN
Maximum Capacity / Filling Slot	No