


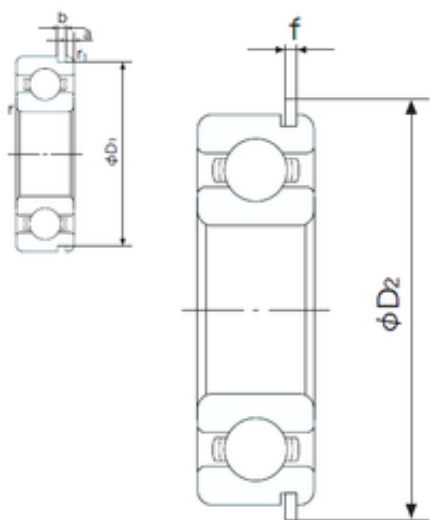

Bearing No. 6201NR

b	1.35 mm
f	1.12 mm
d	12 mm
D	32 mm
B	10 mm
C	10 mm
a	2.06 mm
D2	36.7 mm
D1	30.15 mm
r1	0.5 mm
Noun	Bearing
Bore	0.472 Inch 12 Millimeter
Width	10 mm
r min.	0.6 mm
Weight	0.037 Kg
UNSPSC	31171504
b (min)	1.4 mm
r1 min.	0.5 mm
a (max)	2.1 mm
D1 (max)	30.2 mm
Cy (max)	2.9 mm
Category	Single Row Ball Bearing
Da (max)	27 mm
Dx (min)	37.5 mm
ra (max)	0.6 mm
da (min)	17 mm
Inventory	0.0
Factor fo	12.3
Enclosure	Open

Bore Size	12 mm
Snap Ring	Yes
Bore Type	Cylindrical Bore
Size (mm)	12x32x10
Width (mm)	10
Weight / LBS	0.081
Configuration	Single Row
Inch - Metric	Metric
Product Group	B00308
Cage Material	Steel
Other Features	Deep Groove With Snap Ring
Bearing number	6201NR
Keyword String	Ball
Snap Ring Width	1.1 mm
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Radial Clearance	0.003 to 0.018 mm
Long Description	12MM Bore; 32MM Outside Diameter; 10MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Manufacturer URL	http://www.nachiamerica.com
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.394 Inch 10 Millimeter
Outside Diameter	1.26 Inch 32 Millimeter
Weight / Kilogram	0
Manufacturer Name	NACHI

Bore Diameter (mm)	12
Internal Clearance	C0-Medium
Static Load Rating	3,050 N
Outer Diameter (mm)	32
Dynamic Load Rating	6,800 N
Minimum Buy Quantity	N/A
Limiting Speed - Oil	28,000 rpm
Fillet Radius/Chamfer	0.6 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	22,000 rpm
Internal Special Features	No
(Grease) Lubrication Speed	22000 r/min
Snap Ring Outside Diameter	36.7 mm
Basic static load rating (C0)	3,05 kN
Basic dynamic load rating (C)	6,8 kN
Maximum Capacity / Filling Slot	No