


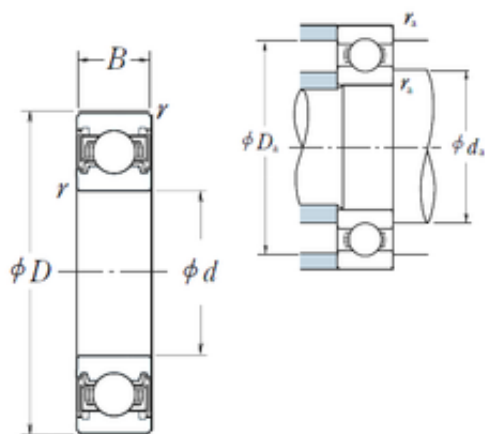

Bearing No. 6201VV

D	32 mm
d	12 mm
B	10 mm
C	10 mm
r	0.6
Z_	7
B_	10
D_	32
ra	0.6
C0	3.05
fo	12.3
DI_	16.047
SRI	3.01
D_a	28
DE_	27.953
DA_	5.953
SRE	3.16
SRIN	0
SBRG	2
yobi	6201VV
SDM_	22
SREX	0.03
KBRG	6151
bomp	0
mass	0.037
Bore	0.472 Inch 12 Millimeter
SRIX	0.015
SREN	0
Noun	Bearing

ALPHA_	0
da min	16
LangID	1
r min.	0,6 mm
UNSPSC	31171504
da max	17 mm
C_conv	6800
Weight	0,037 Kg
ra max.	0,6 mm
hidYobi	6201VV
GRS rpm	22000
da min.	16 mm
Da max.	28 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Snap Ring	No
Size (mm)	12x32x10
Enclosure	2 Seals
Inventory	0.0
Width (mm)	10
Prod_Type3	DGBB_SR_VV
Weight / LBS	0.035
Cage Material	Steel
Product Group	B00308
Inch - Metric	Metric
Bearing number	6201VV
Keyword String	Ball
Enclosure Type	Non-Contact Seal
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.394 Inch 10 Millimeter
Outside Diameter	1.26 Inch 32 Millimeter

Long Description	12MM Bore; 32MM Outside Diameter; 10MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Weight / Kilogram	0.02
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	12
Outer Diameter (mm)	32
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6201VV
Internal Special Features	No
(Grease) Lubrication Speed	22 000 r/min
Basic static load rating (C0)	3,05 kN
Basic dynamic load rating (C)	6,8 kN
Maximum Capacity / Filling Slot	No