


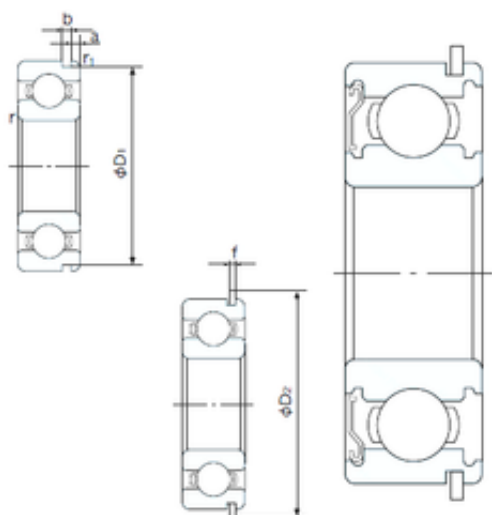

Bearing No. 6201ZENR

a	2.06 mm
f	1.12 mm
b	1.35 mm
d	12 mm
D	32 mm
B	10 mm
C	10 mm
r1	0.5 mm
D2	36.7 mm
D1	30.15 mm
Width	10 mm
Weight	0.037 Kg
r min.	0.6 mm
b (min)	1.4 mm
r1 min.	0.5 mm
a (max)	2.1 mm
Cy (max)	2.9 mm
D1 (max)	30.2 mm
ra (max)	0.6 mm
Da (max)	27 mm
da (min)	17 mm
Dx (min)	37.5 mm
Factor fo	12.3
Bore Size	12 mm
Size (mm)	12x32x10
Bore Type	Cylindrical Bore
Enclosure	Single Shield with Snap Ring
Width (mm)	10
Configuration	Single Row

Bearing number	6201ZENR
Snap Ring Width	1.1 mm
Outside Diameter	32 mm
Radial Clearance	0.003 to 0.018 mm
Static Load Rating	3,050 N
Bore Diameter (mm)	12
Dynamic Load Rating	6,800 N
Outer Diameter (mm)	32
Limiting Speed - Oil	28,000 rpm
Fillet Radius/Chamfer	0.6 mm
Limiting Speed - Grease	22,000 rpm
Snap Ring Outside Diameter	36.7 mm
(Grease) Lubrication Speed	22000 r/min
Basic static load rating (C0)	3,05 kN
Basic dynamic load rating (C)	6,8 kN