


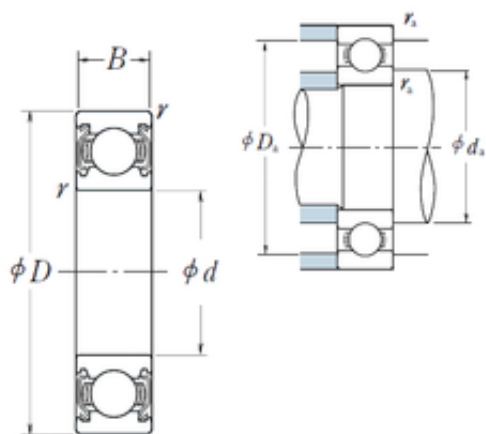

Bearing No. 6201ZZ

D	32 mm
d	12 mm
B	10 mm
C	10 mm
r	0.6
Z_	7
D_	32
B_	10
ra	0.6
C0	3.05
fo	12.3
DI_	16.047
SRI	3.01
SRE	3.16
D_a	28
DA_	5.953
DE_	27.953
SRIN	0
Noun	Bearing
SBRG	2
yobi	6201ZZ
SDM_	22
KBRG	6141
SREX	0.03
bomp	0
mass	0.037
Bore	0.472 Inch 12 Millimeter
SRIX	0.015
SREN	0

LangID	1
da min	16
r min.	0,6 mm
da max	17 mm
ALPHA_	0
C_conv	6800
UNSPSC	31171504
Weight	0,037 Kg
ra max.	0,6 mm
hidYobi	6201ZZ
da min.	16 mm
series:	62
GRS rpm	22000
Da max.	28 mm
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Inventory	0.0
Enclosure	2 Metal Shields
Size (mm)	12x32x10
Snap Ring	No
Prod_Type3	DGBB_SR_ZZ
Width (mm)	10
bore type:	Round
Weight / LBS	0.07
maximum rpm:	28000 RPM
closure type:	Double Shielded
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	6201ZZ
Keyword String	Ball
fillet radius:	0.6 mm

cage material:	Steel
overall width:	10 mm
bore diameter:	12 mm
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Rolling Element	Ball Bearing
Manufacturer URL	http://www.nskamericas.com
Long Description	12MM Bore; 32MM Outside Diameter; 10MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outside Diameter	1.26 Inch 32 Millimeter
Outer Race Width	0.394 Inch 10 Millimeter
Manufacturer Name	NSK
Weight / Kilogram	0.038
outside diameter:	32 mm
outer ring width:	10 mm
precision rating:	Not Rated
Internal Clearance	C0-Medium
Bore Diameter (mm)	12
internal clearance:	C0
Outer Diameter (mm)	32
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
static load capacity:	3050 N
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	6800 N
Manufacturer Item Number	6201ZZ

Internal Special Features	No
(Grease) Lubrication Speed	22 000 r/min
operating temperature range:	-10 to +110 °C
Basic static load rating (C0)	3,05 kN
Basic dynamic load rating (C)	6,8 kN
Maximum Capacity / Filling Slot	No