


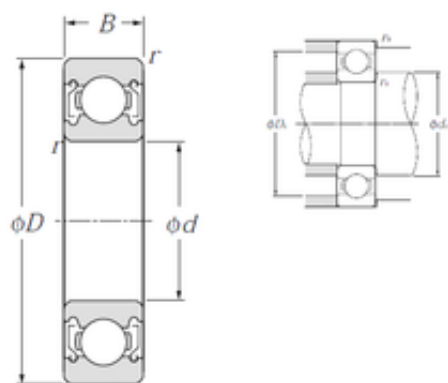

Bearing No. 6201ZZ

D	32 mm
d	12 mm
B	10 mm
C	10 mm
rn	0,5 mm
Bore	0.472 Inch 12 Millimeter
Noun	Bearing
da max	17 mm
UNSPSC	31171504
Weight	0,037 Kg
r min.	0,6 mm
ra max.	0,6 mm
da min.	16 mm
Da max.	28 mm
Category	Single Row Ball Bearing
Size (mm)	12x32x10
Snap Ring	No
Inventory	0.0
Enclosure	2 Metal Shields
Width (mm)	10
bore type:	Round
Weight / LBS	0.082
Inch - Metric	Metric
closure type:	Double Shielded
Product Group	B00308
Cage Material	Steel
bore diameter:	12 mm
Keyword String	Ball
overall width:	10 mm

cage material:	Steel
fillet radius:	0.6 mm
Other Features	Deep Groove
Bearing number	6201ZZ
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Manufacturer URL	http://www.ntnamerica.com
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.394 Inch 10 Millimeter
Outside Diameter	1.26 Inch 32 Millimeter
Long Description	12MM Bore; 32MM Outside Diameter; 10MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel
precision rating:	ISO Class 0
outside diameter:	32 mm
outer ring width:	10 mm
inner ring width:	10 mm
bearing material:	High Carbon Chrome Steel
Weight / Kilogram	0.037
Manufacturer Name	NTN
Bore Diameter (mm)	12
Internal Clearance	C0-Medium
Outer Diameter (mm)	32
internal clearance:	CN
snap ring included:	Without Snap Ring

Minimum Buy Quantity	N/A
static load capacity:	2750 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	22000 rpm
dynamic load capacity:	6100 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6201ZZ
Internal Special Features	No
manufacturer product page:	Click here
(Grease) Lubrication Speed	22 000 r/min
operating temperature range:	-40 to 120 °C
Basic dynamic load rating (C)	6,1 kN
Basic static load rating (C0)	2,75 kN
Maximum Capacity / Filling Slot	No