


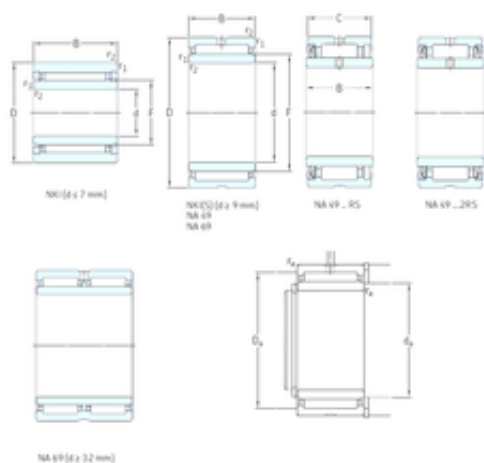

**Bearing No. NA4840**

|                               |            |
|-------------------------------|------------|
| S                             | 1,5 mm     |
| d                             | 200 mm     |
| F                             | 220 mm     |
| D                             | 250 mm     |
| B                             | 50 mm      |
| C                             | 50 mm      |
| Weight                        | 5,8 Kg     |
| da max                        | 208 mm     |
| r1 min.                       | 1,5 mm     |
| ra max.                       | 1,5 mm     |
| r2 min.                       | 1,5 mm     |
| Da max.                       | 242 mm     |
| Size (mm)                     | 200x250x50 |
| Width (mm)                    | 50         |
| Bearing number                | NA4840     |
| Reference speed               | 1800 r/min |
| Bore Diameter (mm)            | 200        |
| Outer Diameter (mm)           | 250        |
| Fatigue load limit (Pu)       | 75         |
| Basic dynamic load rating (C) | 224 kN     |
| Basic static load rating (C0) | 735 kN     |