


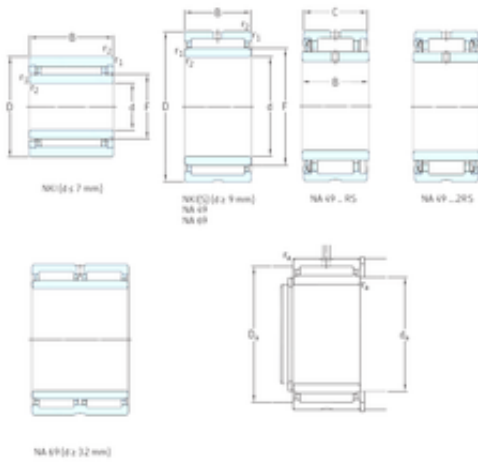

**Bearing No. NA4852**

|                               |            |
|-------------------------------|------------|
| S                             | 2 mm       |
| d                             | 260 mm     |
| F                             | 285 mm     |
| D                             | 320 mm     |
| B                             | 60 mm      |
| C                             | 60 mm      |
| Weight                        | 10,5 Kg    |
| da max                        | 269 mm     |
| r1 min.                       | 2 mm       |
| ra max.                       | 2 mm       |
| r2 min.                       | 2 mm       |
| Da max.                       | 311 mm     |
| Size (mm)                     | 260x320x60 |
| Width (mm)                    | 60         |
| Bearing number                | NA4852     |
| Reference speed               | 1400 r/min |
| Bore Diameter (mm)            | 260        |
| Outer Diameter (mm)           | 320        |
| Fatigue load limit (Pu)       | 114        |
| Basic dynamic load rating (C) | 358 kN     |
| Basic static load rating (C0) | 1200 kN    |