


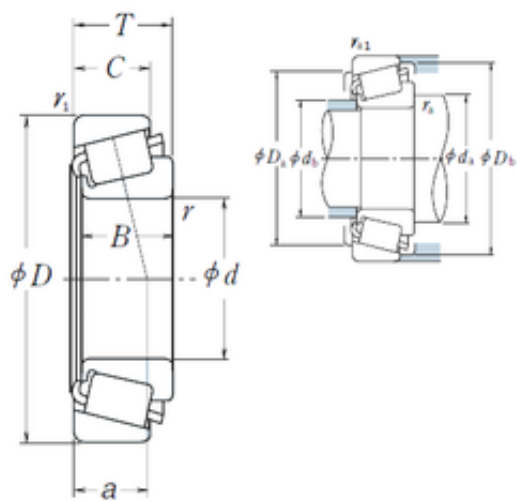

Bearing No. 766/752

|      |            |
|------|------------|
| e    | 0.34       |
| d    | 88,9 mm    |
| D    | 161,925 mm |
| T    | 47,625 mm  |
| B    | 48,26 mm   |
| C    | 38,1 mm    |
| a    | 35,6 mm    |
| Da   | 144 mm     |
| B_   | 48.26      |
| Db   | 150 mm     |
| da   | 113 mm     |
| Y0   | 0.97       |
| db   | 99 mm      |
| C0   | 390        |
| D_   | 161.925    |
| Z_   | 19         |
| C_   | 38.1       |
| Y1   | 1.8        |
| DE_  | 138.839    |
| SLR  | 34         |
| D_a  | 144        |
| DI_  | 105.124    |
| DA1  | 18.283     |
| DA2  | 16.411     |
| CUP  | 1.61       |
| DA_  | 17.351     |
| D_b  | 150        |
| RAr  | 330.864    |
| SDM_ | 122.225    |
| KBRG | 3161       |
|      |            |

|                        |                     |
|------------------------|---------------------|
| yobi                   | 766/752             |
| CONE                   | 2.45                |
| ALP21                  | 25                  |
| ALP22                  | 37                  |
| ALP23                  | 20                  |
| BETA_                  | 1                   |
| BET21                  | 3                   |
| BET23                  | 0                   |
| BET22                  | 10                  |
| r min.                 | 7 mm                |
| LangID                 | 1                   |
| Weight                 | 4,06 Kg             |
| ALPHA_                 | 12.811              |
| r1 min.                | 3,3 mm              |
| ra max.                | 7 mm                |
| Oil rpm                | 3000                |
| outer r                | 3.3                 |
| hidYobi                | 766/752             |
| GRS rpm                | 2200                |
| inner r                | 7                   |
| hidTable               | ecat_NSTPRI         |
| inner ra               | 7                   |
| outer rb               | 3.3                 |
| ra1 max.               | 3,3 mm              |
| Size (mm)              | 88.9x161.925x47.625 |
| SHOG_yobi              | 766R/752R           |
| Prod_Type3             | TRBSR_ID_A          |
| Width (mm)             | 47,625              |
| Bearing number         | 766/752             |
| Bore Diameter (mm)     | 88,9                |
| Outer Diameter (mm)    | 161,925             |
| Calculation factor (e) | 0,34                |
|                        |                     |

|                               |            |
|-------------------------------|------------|
| (Oil) Lubrication Speed       | 3000 r/min |
| Calculation factor (Y0)       | 0,97       |
| (Grease) Lubrication Speed    | 2200 r/min |
| Basic static load rating (C0) | 390 kN     |
| Basic dynamic load rating (C) | 274 kN     |