


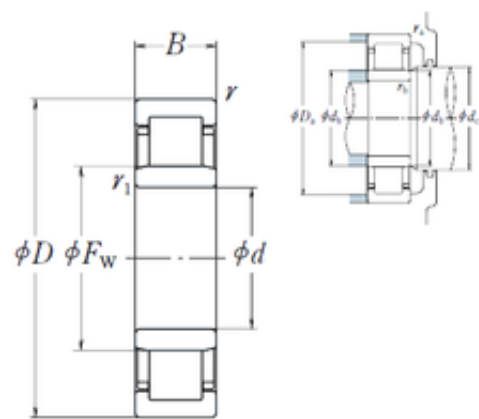

Bearing No. NU1008

C	15 mm
r	1
d	40 mm
D	68 mm
B	15 mm
ra	1
C0	29
da	45
Z_	18
rb	0.6
D_	68
Ew	61 mm
Fw	47 mm
r1	0.6
B_	15
DA_	7
DE_	61
DI_	47
SBRG	10
KBRG	4144
mass	0.223
SDM_	54
yobi	NU1008
dc min	49
db min	44
r min.	1 mm
ALPHA_	0
db max	46
C_conv	27300
Weight	0,223 Kg

LangID	1
hidYobi	NU1008
r1 min.	0,6 mm
D_a max	63
ra max.	1 mm
da min.	45 mm
rb max.	0,6 mm
TSR rpm	10000
GRS rpm	10000
Oil rpm	12000
hidTable	ecat_NSCLDR
Prod_Type3	CRB_SR_NU
Bearing number	NU1008
Bore Diameter (mm)	40
Outer Diameter (mm)	61
(Grease) Lubrication Speed	10 000 r/min
Basic dynamic load rating (C)	27,3 kN
Basic static load rating (C0)	29 kN