




Bearing No. NU1008-M1

E	61 mm
F	47 mm
d	40 mm
D	68 mm
B	15 mm
m	0,216 kg / Weight
S	2 mm / Axial displacement facility from central position
Size (mm)	40x68x15
Width (mm)	15
n_B	8900 1/min
n_G	17700 1/min / Limiting speed
D_1	58,2 mm
C_r	33500 N / Dynamic load rating (radial)
C_{Or}	30500 N / Static load rating (radial)
Bearing number	NU1008-M1
C_{ur}	3800 N / Fatigue limit load, radial
r_{min}	1 mm
$r_{1 min}$	0,6 mm
$r_{a max}$	1 mm
$d_{b min}$	49 mm
$d_{a min}$	43 mm
$d_{a max}$	46 mm
$D_{a max}$	63 mm
$r_{a1 max}$	0,6 mm

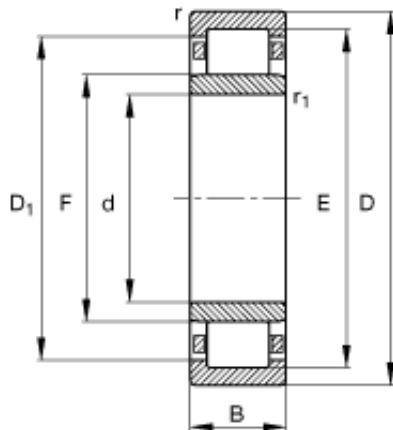

Bore Diameter (mm)	40
Outer Diameter (mm)	68