


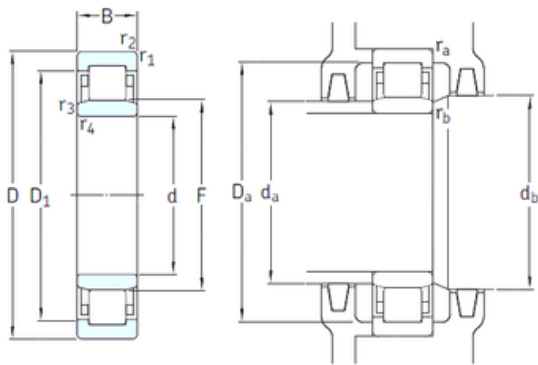

Bearing No. NU1008ML/HC5C3

F	47 mm
S	2,4 mm
d	40 mm
D	68 mm
B	15 mm
C	15 mm
D1	57,6 mm
Weight	0,21 Kg
db min	49 mm
da max	45 mm
Da max.	63,4 mm
da min.	43,2 mm
r2 min.	1 mm
r4 min.	0,6 mm
r3 min.	0,6 mm
rb max.	0,6 mm
r1 min.	1 mm
ra max.	1 mm
Size (mm)	40x68x15
Width (mm)	15
Bearing number	NU1008ML/HC5C3
Limiting speed	18000 r/min
Reference speed	12000 r/min
Bore Diameter (mm)	40
Outer Diameter (mm)	68
Fatigue load limit (Pu)	3,35
Basic dynamic load rating (C)	25,5 kN
Basic static load rating (C0)	26,5 kN