


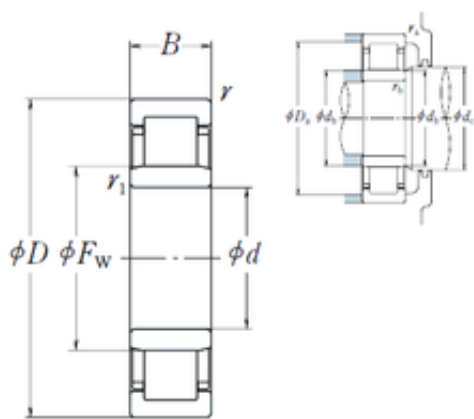

Bearing No. NU10/500

r	6
d	500 mm
D	720 mm
B	100 mm
C	100 mm
D_	720
ra	5
Z_	28
rb	5
B_	100
C0	2970
r1	6
Fw	556 mm
Ew	664 mm
DI_	556
DA_	54
DE_	664
yobi	NU10/500
mass	131
KBRG	4144
SDM_	610
SBRG	10
dc min	558
LangID	1
C_conv	1660000
ALPHA_	0
Weight	131 Kg
db max	551
db min	526
r min.	6 mm

D_a max	694
Oil rpm	850
TSR rpm	900
GRS rpm	710
hidYobi	NU10/500
rb max.	5 mm
ra max.	5 mm
da min.	526 mm
r1 min.	6 mm
hidTable	ecat_NSCLDR
Prod_Type3	CRB_SR_NU
Bearing number	NU10/500
Bore Diameter (mm)	500
Outer Diameter (mm)	664
(Grease) Lubrication Speed	710 r/min
Basic static load rating (C0)	2970 kN
Basic dynamic load rating (C)	1660 kN