


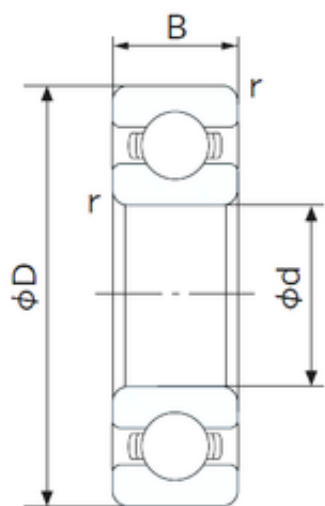

Bearing No. 6204

C	14 mm
d	20 mm
D	47 mm
B	14 mm
Bore	0.787 Inch 20 Millimeter
Noun	Bearing
Width	14 mm
Weight	0.106 Kg
r min.	1 mm
UNSPSC	31171504
da min.	26 mm
Da max.	41 mm
ra max.	1.0 mm
da (min)	26 mm
Da (max)	41 mm
Category	Single Row Ball Bearing
ra (max)	1 mm
Bore Type	Cylindrical Bore
Enclosure	Open
Factor fo	13.1
Inventory	0.0
Bore Size	20 mm
Size (mm)	20x47x14
Snap Ring	No
Width (mm)	14
Weight / LBS	0.234
Configuration	Single Row
Inch - Metric	Metric
Cage Material	Steel

Product Group	B00308
Bearing number	6204
Other Features	Deep Groove
Keyword String	Ball
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Outer Race Width	0.551 Inch 14 Millimeter
Long Description	20MM Bore; 47MM Outside Diameter; 14MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Radial Clearance	0.005 to 0.020 mm
Manufacturer URL	http://www.nachiamerica.com
Outside Diameter	1.85 Inch 47 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Manufacturer Name	NACHI
Weight / Kilogram	0
Internal Clearance	C0-Medium
Static Load Rating	6,600 N
Bore Diameter (mm)	20
Dynamic Load Rating	12,800 N
Outer Diameter (mm)	47
Minimum Buy Quantity	N/A
Limiting Speed - Oil	18,000 rpm
Fillet Radius/Chamfer	1 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	16,000 rpm
Internal Special	No

Features	
(Grease) Lubrication Speed	14000 r/min
Basic static load rating (C0)	6,6 kN
Basic dynamic load rating (C)	12,8 kN
Maximum Capacity / Filling Slot	No