


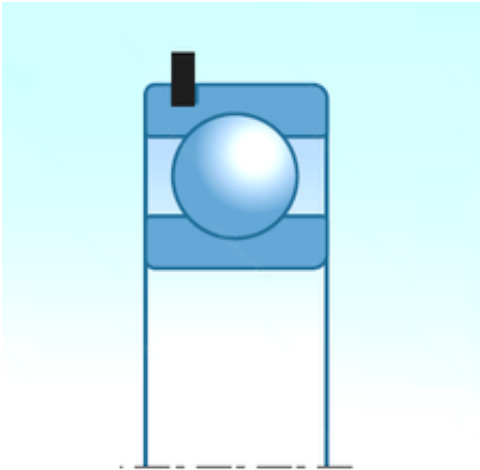

Bearing No. 6204LLUN

C	14,000 mm
d	20,000 mm
D	47,000 mm
B	14,000 mm
Noun	Bearing
Bore	0.787 Inch 20 Millimeter
UNSPSC	31171504
series:	62
Category	Single Row Ball Bearing
Snap Ring	Yes
Inventory	0.0
Enclosure	2 Seals
Size (mm)	20x47x14
Width (mm)	14,000
bore type:	Round
maximum rpm:	18000 RPM
Weight / LBS	0.234
Inch - Metric	Metric
Cage Material	Steel
closure type:	Double Sealed
Product Group	B00308
bore diameter:	20 mm
overall width:	14 mm
cage material:	Steel
fillet radius:	1 mm
standards met:	MIL-G-3545C
Bearing number	6204LLUN
Keyword String	Ball
Other Features	Deep Groove Double Lip Friction Nitrile

	Rubber Seal With Snap Ring Groove -20 To 120 Deg C
Enclosure Type	Contact Seal
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Rolling Element	Ball Bearing
Long Description	20MM Bore; 47MM Outside Diameter; 14MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Manufacturer URL	http://www.ntnamerica.com
Outer Race Width	0.551 Inch 14 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	1.85 Inch 47 Millimeter
precision rating:	Class 0
Manufacturer Name	NTN
outer ring width:	14 mm
Weight / Kilogram	0.103
inner ring width:	14 mm
bearing material:	High Carbon Chrome Steel
outside diameter:	47 mm
Internal Clearance	C0-Medium
Bore Diameter (mm)	20,000
internal clearance:	CN
Outer Diameter (mm)	47,000
snap ring included:	Without Snap Ring

Minimum Buy Quantity	N/A
static load capacity:	6650 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	10000 rpm
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	12800 N
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Maximum Capacity / Filling Slot	No