


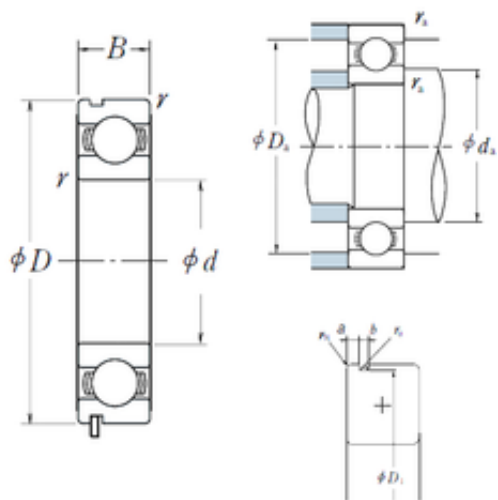

Bearing No. 6204N

a	2,46 mm
r	1
d	20 mm
D	47 mm
B	14 mm
C	14 mm
b	1,35 mm
fo	13.1
B_	14
ra	1
C0	6.6
D1	44,6 mm
D_	47
Z_	8
rn	0,5 mm
ro	0.4
DE_	41.438
SRI	4.01
D_a	42
DA_	7.938
SRE	4.21
DI_	25.562
yobi	6204N
mass	0.107
SBRG	2
bomp	0
KBRG	6101
SREX	0.04
SREN	0
SRIN	0

SDM_	33.5
SRIX	0.02
ALPHA_	0
r min.	1 mm
C_conv	12800
da max	26,5 mm
da min	25
Weight	0,107 Kg
LangID	1
ra max.	1 mm
Da max.	42 mm
Oil rpm	18000
da min.	25 mm
r0 max.	0,4 mm
hidYobi	6204N
GRS rpm	15000
hidTable	ecat_NSRDGB
Size (mm)	20x47x14
Prod_Type3	DGBB_SR_N_OT
Width (mm)	14
Bearing number	6204N
Bore Diameter (mm)	20
Outer Diameter (mm)	47
(Oil) Lubrication Speed	18 000 r/min
(Grease) Lubrication Speed	15 000 r/min
Basic dynamic load rating (C)	12,8 kN
Basic static load rating (C0)	6,6 kN