


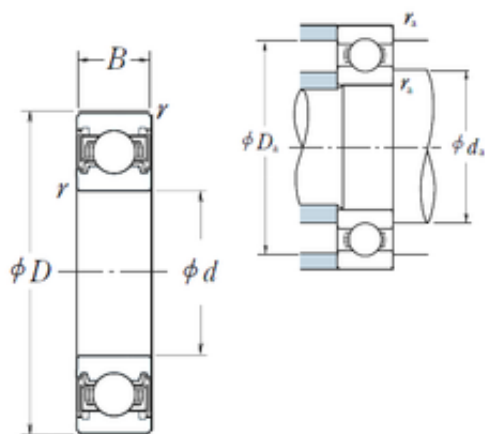

Bearing No. 6204VV

D	47 mm
d	20 mm
B	14 mm
C	14 mm
r	1
Z_	8
B_	14
D_	47
ra	1
C0	6.6
fo	13.1
DI_	25.562
SRI	4.01
D_a	42
DE_	41.438
DA_	7.938
SRE	4.21
SRIN	0
SBRG	2
yobi	6204VV
SDM_	33.5
SREX	0.04
KBRG	6151
bomp	0
mass	0.107
Bore	0.787 Inch 20 Millimeter
SRIX	0.02
SREN	0
Noun	Bearing

ALPHA_	0
da min	25
LangID	1
r min.	1 mm
UNSPSC	31171504
da max	26,5 mm
C_conv	12800
Weight	0,107 Kg
ra max.	1 mm
hidYobi	6204VV
GRS rpm	15000
da min.	25 mm
Da max.	42 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Snap Ring	No
Size (mm)	20x47x14
Enclosure	2 Seals
Inventory	0.0
Width (mm)	14
Prod_Type3	DGBB_SR_VV
Weight / LBS	0.105
Cage Material	Steel
Product Group	B00308
Inch - Metric	Metric
Bearing number	6204VV
Keyword String	Ball
Enclosure Type	Non-Contact Seal
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.551 Inch 14 Millimeter
Outside Diameter	1.85 Inch 47 Millimeter

Long Description	20MM Bore; 47MM Outside Diameter; 14MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Weight / Kilogram	0.05
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	20
Outer Diameter (mm)	47
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6204VV
Internal Special Features	No
(Grease) Lubrication Speed	15 000 r/min
Basic static load rating (C0)	6,6 kN
Basic dynamic load rating (C)	12,8 kN
Maximum Capacity / Filling Slot	No