


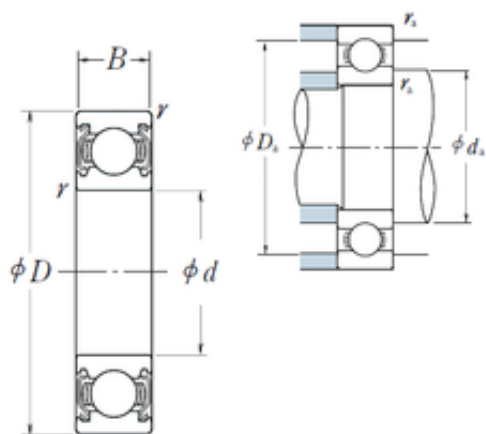

Bearing No. 6204ZZ

D	47 mm
d	20 mm
B	14 mm
C	14 mm
r	1
Z_	8
D_	47
B_	14
ra	1
C0	6.6
fo	13.1
DI_	25.562
SRI	4.01
SRE	4.21
D_a	42
DA_	7.938
DE_	41.438
SRIN	0
Noun	Bearing
SBRG	2
yobi	6204ZZ
SDM_	33.5
KBRG	6141
SREX	0.04
bomp	0
mass	0.107
Bore	0.787 Inch 20 Millimeter
SRIX	0.02
SREN	0

LangID	1
da min	25
r min.	1 mm
da max	26,5 mm
ALPHA_	0
C_conv	12800
UNSPSC	31171504
Weight	0,107 Kg
ra max.	1 mm
hidYobi	6204ZZ
series:	62
da min.	25 mm
GRS rpm	15000
Da max.	42 mm
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Inventory	0.0
Enclosure	2 Metal Shields
Size (mm)	20x47x14
Snap Ring	No
Prod_Type3	DGBB_SR_ZZ
Width (mm)	14
bore type:	Round
Weight / LBS	0.105
maximum rpm:	18000 RPM
closure type:	Double Shielded
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	6204ZZ
Keyword String	Ball
fillet radius:	1 mm

cage material:	Steel
overall width:	14 mm
bore diameter:	20 mm
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Rolling Element	Ball Bearing
Manufacturer URL	http://www.nskamericas.com
Long Description	20MM Bore; 47MM Outside Diameter; 14MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outer Race Width	0.551 Inch 14 Millimeter
Outside Diameter	1.85 Inch 47 Millimeter
Manufacturer Name	NSK
Weight / Kilogram	0.05
outside diameter:	47 mm
outer ring width:	14 mm
precision rating:	ABEC 1 (ISO Class Normal)
Internal Clearance	C0-Medium
Bore Diameter (mm)	20
internal clearance:	C0
Outer Diameter (mm)	47
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
static load capacity:	6600 N
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	12800 N
Manufacturer Item	6204ZZ

Number	
Internal Special Features	No
(Grease) Lubrication Speed	15 000 r/min
operating temperature range:	-10 to +110 °C
Basic static load rating (C0)	6,6 kN
Basic dynamic load rating (C)	12,8 kN
Maximum Capacity / Filling Slot	No