


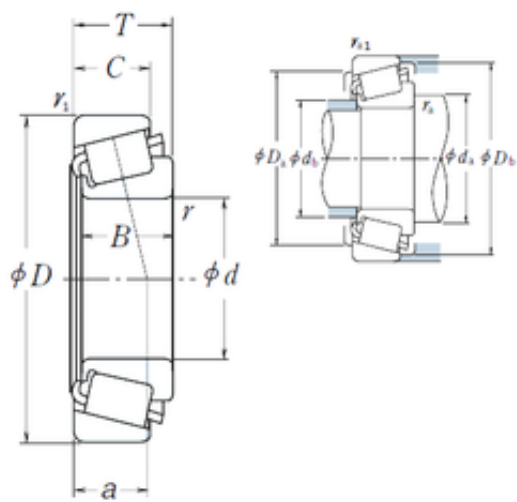

Bearing No. 37425/37625

e	0.61
d	107,95 mm
D	158,75 mm
T	23,02 mm
B	21,438 mm
C	15,875 mm
a	37 mm
Da	143 mm
B_	21.438
Db	152 mm
da	122 mm
Y0	0.54
db	115 mm
C0	165
D_	158.75
Z_	32
C_	15.875
Y1	0.99
DE_	141.743
SLR	14.2
D_a	143
DI_	122.322
DA1	10.871
DA2	10.09
CUP	0.488
DA_	10.483
D_b	152
RAr	196.722
SDM_	132.297
KBRG	3161

yobi	37425/37625
CONE	0.886
ALP21	44
ALP22	0
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	10
r min.	3,5 mm
LangID	1
Weight	1,374 Kg
ALPHA_	22
r1 min.	3,3 mm
ra max.	3,5 mm
Oil rpm	2800
outer r	3.3
hidYobi	37425/37625
GRS rpm	2000
inner r	3.5
hidTable	ecat_NSTPRI
inner ra	3.5
outer rb	3.3
ra1 max.	3,3 mm
Size (mm)	107.95x158.75x23.02
SHOG_yobi	37425R/37625R
Prod_Type3	TRBSR_ID_A
Width (mm)	23,02
Bearing number	37425/37625
Bore Diameter (mm)	107,95
Outer Diameter (mm)	158,75
Calculation factor (e)	0,61

(Oil) Lubrication Speed	2800 r/min
Calculation factor (Y0)	0,54
(Grease) Lubrication Speed	2000 r/min
Basic static load rating (C0)	165 kN
Basic dynamic load rating (C)	102 kN