


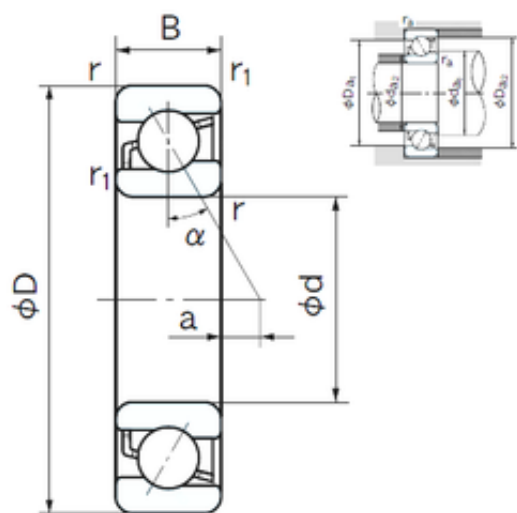

Bearing No. 7200B

D	30 mm
d	10 mm
B	9 mm
C	9 mm
a	3.9 mm
r1	0.3 mm
Noun	Bearing
Bore	0.394 Inch 10 Millimeter
Width	0.354 Inch 9 Millimeter
UNSPSC	31171531
r min.	0.6 mm
Weight	0.034 Kg
ra max.	0.6 mm
da min.	15 mm
Da max.	25 mm
r1 min.	0.3 mm
Category	Angular Contact Ball Bearing
ra (max)	0.6 mm
Size (mm)	10x30x9
da1 (min)	15 mm
da2 (min)	12 mm
Bore Size	10 mm
Bore Type	Cylindrical Bore
Da1 (max)	25 mm
Da2 (max)	27.4 mm
ra1 (max)	0.3 mm
Snap Ring	No
Enclosure	Open
Inventory	0.0

Width (mm)	9
Flush Ground	No
Weight / LBS	0.07
Contact Angle	40 Degree
Inch - Metric	Metric
Product Group	B00308
Configuration	Single Row
Cage Material	Steel
Bearing number	7200B
Keyword String	Angular Contact
Rolling Element	Ball Bearing
Angle (?)	40 °
Precision Class	ABEC 1 ISO P0
Long Description	10MM Bore; 30MM Outside Diameter; 9MM Width; Open; No Flush Ground; Ball Bearing; Single Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring
Manufacturer URL	http://www.nachi.com
Outside Diameter	1.181 Inch 30 Millimeter
Manufacturer Name	NACHI
Weight / Kilogram	0.032
Static Load Rating	2,570 N
Internal Clearance	C0-Medium
Number of Bearings	1 (Single)
Bore Diameter (mm)	10
Outer Diameter (mm)	30
Dynamic Load Rating	5,150 N
Minimum Buy Quantity	N/A
Limiting Speed - Oil	28,000 rpm
Fillet Radius/Chamfer	0.6 mm

Harmonized Tariff Code	8482.10.50.28
Limiting Speed - Grease	19,000 rpm
Number of Rows of Balls	Single Row
Manufacturer Item Number	7200 B BNLS
(Grease) Lubrication Speed	19000 r/min
Basic dynamic load rating (C)	5,15 kN
Basic static load rating (C0)	2,57 kN
Maximum Capacity / Filling Slot	No