


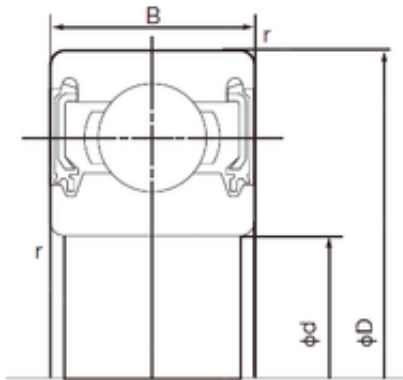

Bearing No. 6205-2NKE9

|                               |                   |
|-------------------------------|-------------------|
| D                             | 52 mm             |
| d                             | 25 mm             |
| B                             | 15 mm             |
| C                             | 15 mm             |
| Width                         | 15 mm             |
| Weight                        | 0.128 kg          |
| r min.                        | 1.0 mm            |
| ra (max)                      | 1 mm              |
| Da (max)                      | 46 mm             |
| da (min)                      | 31 mm             |
| Factor fo                     | 13.9              |
| Bore Size                     | 25 mm             |
| Enclosure                     | Double Seal       |
| Size (mm)                     | 25x52x15          |
| Bore Type                     | Cylindrical Bore  |
| Width (mm)                    | 15                |
| Configuration                 | Single Row        |
| Bearing number                | 6205-2NKE9        |
| Outside Diameter              | 52 mm             |
| Radial Clearance              | 0.005 to 0.020 mm |
| Static Load Rating            | 7,900 N           |
| Bore Diameter (mm)            | 25                |
| Dynamic Load Rating           | 14,000 N          |
| Outer Diameter (mm)           | 52                |
| Limiting Speed - Grease       | 13,000 rpm        |
| Basic static load rating (C0) | 7,9 kN            |
| Basic dynamic load rating (C) | 14 kN             |