


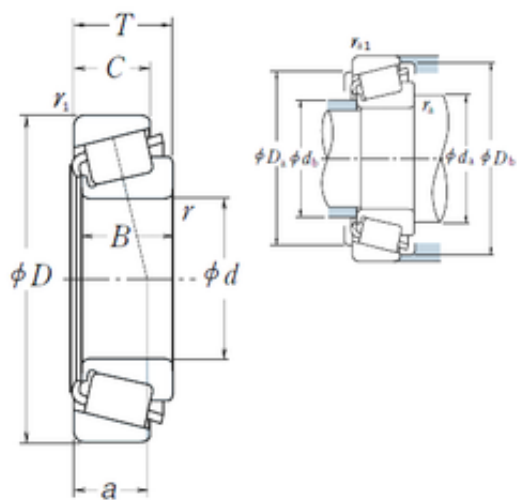

Bearing No. 68462/68712

e	0.5
d	117,475 mm
D	180,975 mm
T	34,925 mm
B	31,75 mm
C	25,4 mm
a	40 mm
Da	163 mm
B_	31.75
Db	172 mm
da	132 mm
Y0	0.66
db	125 mm
C0	254
D_	180.975
Z_	25
C_	25.4
Y1	1.2
DE_	161.031
SLR	19
D_a	163
DI_	131.87
DA1	15.434
DA2	14.334
CUP	1.05
DA_	15.381
D_b	172
RAr	265.321
SDM_	146.758
KBRG	3161

yobi	68462/68712
CONE	1.73
ALP21	36
ALP22	40
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	20
r min.	3,5 mm
LangID	1
Weight	2,78 Kg
ALPHA_	18.333
r1 min.	3,3 mm
ra max.	3,5 mm
Oil rpm	2400
outer r	3.3
hidYobi	68462/68712
GRS rpm	1800
inner r	3.5
hidTable	ecat_NSTPRI
inner ra	3.5
outer rb	3.3
ra1 max.	3,3 mm
Size (mm)	117.475x180.975x34.925
SHOG_yobi	68462/68712
Prod_Type3	TRBSR_ID_A
Width (mm)	34,925
Bearing number	68462/68712
Bore Diameter (mm)	117,475
Outer Diameter (mm)	180,975
Calculation factor (e)	0,5

(Oil) Lubrication Speed	2400 r/min
Calculation factor (Y0)	0,66
(Grease) Lubrication Speed	1800 r/min
Basic static load rating (C0)	254 kN
Basic dynamic load rating (C)	174 kN