


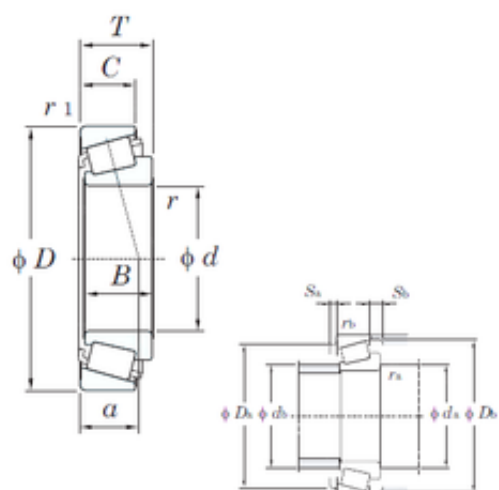

Bearing No. 681/672

|           |                       |
|-----------|-----------------------|
| C         | 30,162 mm             |
| a         | 38,6 mm               |
| e         | 0.47                  |
| d         | 92,075 mm             |
| D         | 168,275 mm            |
| T         | 41,275 mm             |
| B         | 41,275 mm             |
| db        | 104.0                 |
| da        | 110.0                 |
| Cr        | 282                   |
| Da        | 149 mm                |
| Db        | 160 mm                |
| Cu        | 50.4                  |
| Y1        | 1.28                  |
| Y0        | 0.70                  |
| C0r       | 349                   |
| a(mm)     | 38.6                  |
| Weight    | 3,83 Kg               |
| r(min)    | 3.6                   |
| db min    | 104 mm                |
| r min.    | 3,6 mm                |
| ra max.   | 3,6 mm                |
| r1(min)   | 3.2                   |
| rb(max)   | 3.2                   |
| ra(max)   | 3.6                   |
| da min.   | 110 mm                |
| r2 min.   | 3,2 mm                |
| rb max.   | 3,2 mm                |
| Oil lub.  | 3000                  |
| Size (mm) | 92.075x168.275x41.275 |
|           |                       |

|                               |            |
|-------------------------------|------------|
| Width (mm)                    | 41,275     |
| Bearing No.                   | 681/672    |
| Grease lub.                   | 2200       |
| Bearing number                | 681/672    |
| (Refer.)Mass(kg)              | 3.83       |
| Bore Diameter (mm)            | 92,075     |
| Outer Diameter (mm)           | 168,275    |
| Calculation factor (e)        | 0,47       |
| Calculation factor (Y0)       | 0,7        |
| (Oil) Lubrication Speed       | 3000 r/min |
| (Grease) Lubrication Speed    | 2200 r/min |
| Basic dynamic load rating (C) | 224 kN     |
| Basic static load rating (C0) | 349 kN     |