


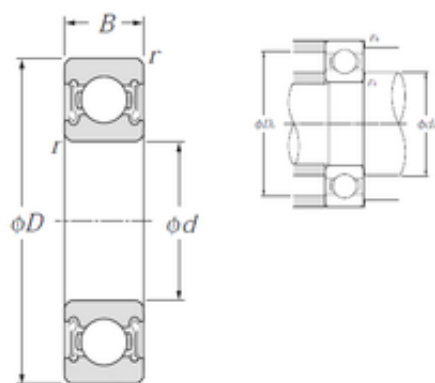

Bearing No. 6205LLB

C	15 mm
d	25 mm
D	52 mm
B	15 mm
Bore	0.984 Inch 25 Millimeter
Noun	Bearing
Weight	0,128 Kg
da max	32 mm
r min.	1 mm
UNSPSC	31171504
da min.	30 mm
Da max.	47 mm
ra max.	1 mm
series:	62
Category	Single Row Ball Bearing
Inventory	0.0
Size (mm)	25x52x15
Snap Ring	No
Enclosure	2 Seals
bore type:	Round
Width (mm)	15
Weight / LBS	0.282
maximum rpm:	15000 RPM
closure type:	Double Sealed
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
bore diameter:	25 mm
overall width:	15 mm

Enclosure Type	Non-Contact Seal
cage material:	Steel
fillet radius:	1 mm
Other Features	Deep Groove Non-Friction Nitrile Rubber Seal Shell Alvania Prelubricated
Keyword String	Ball
Bearing number	6205LLB
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	2.047 Inch 52 Millimeter
Outer Race Width	0.591 Inch 15 Millimeter
Long Description	25MM Bore; 52MM Outside Diameter; 15MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Manufacturer URL	http://www.ntnamerica.com
Weight / Kilogram	0
outer ring width:	15 mm
Manufacturer Name	NTN
bearing material:	High Carbon Chrome Steel
inner ring width:	15 mm
outside diameter:	52 mm
precision rating:	ISO Class 0

Internal Clearance	C0-Medium
Bore Diameter (mm)	25
Outer Diameter (mm)	52
internal clearance:	CN
snap ring included:	Without Snap Ring
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	13000 rpm
static load capacity:	7850 N
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	14000 N
Internal Special Features	No
(Grease) Lubrication Speed	13 000 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	7,85 kN
Basic dynamic load rating (C)	14 kN
Maximum Capacity / Filling Slot	No