


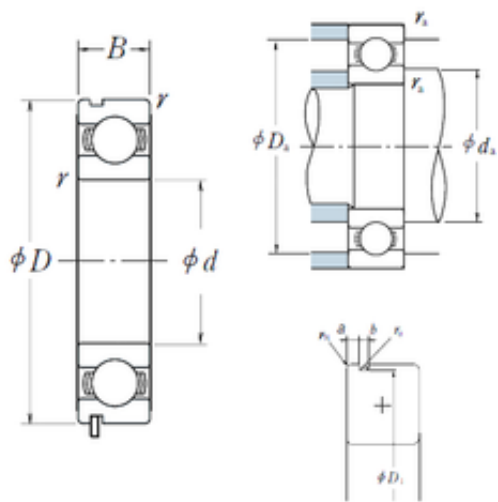

Bearing No. 6205N

a	2,46 mm
r	1
d	25 mm
D	52 mm
B	15 mm
C	15 mm
b	1,35 mm
fo	13.9
B_	15
ra	1
C0	7.85
D1	49,73 mm
D_	52
Z_	9
rn	0,5 mm
ro	0.4
DE_	46.938
SRI	4.01
D_a	47
DA_	7.938
SRE	4.21
DI_	31.062
yobi	6205N
mass	0.129
SBRG	2
bomp	0
KBRG	6101
SREX	0.04
SREN	0
SRIN	0

SDM_	39
SRIX	0.02
ALPHA_	0
r min.	1 mm
C_conv	14000
da max	32 mm
da min	30
Weight	0,129 Kg
LangID	1
ra max.	1 mm
Da max.	47 mm
Oil rpm	15000
da min.	30 mm
r0 max.	0,4 mm
hidYobi	6205N
GRS rpm	13000
hidTable	ecat_NSRDGB
Size (mm)	25x52x15
Prod_Type3	DGBB_SR_N_OT
Width (mm)	15
Bearing number	6205N
Bore Diameter (mm)	25
Outer Diameter (mm)	52
(Oil) Lubrication Speed	15 000 r/min
(Grease) Lubrication Speed	13 000 r/min
Basic dynamic load rating (C)	14 kN
Basic static load rating (C0)	7,85 kN