


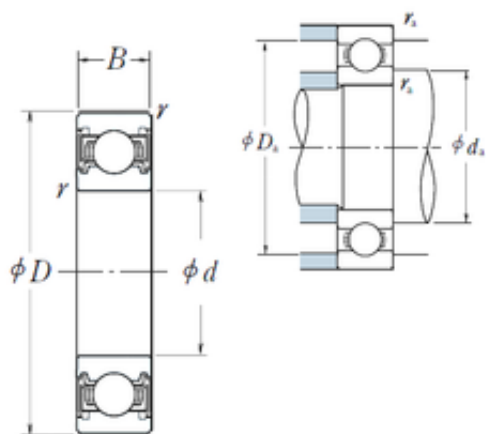

Bearing No. 6205VV

D	52 mm
d	25 mm
B	15 mm
C	15 mm
r	1
Z_	9
B_	15
D_	52
ra	1
C0	7.85
fo	13.9
DI_	31.062
SRI	4.01
D_a	47
DE_	46.938
DA_	7.938
SRE	4.21
SRIN	0
SBRG	2
yobi	6205VV
SDM_	39
SREX	0.04
KBRG	6151
bomp	0
mass	0.129
Bore	0.984 Inch 25 Millimeter
SRIX	0.02
SREN	0
Noun	Bearing

ALPHA_	0
da min	30
LangID	1
r min.	1 mm
UNSPSC	31171504
C_conv	14000
da max	32 mm
Weight	0,129 Kg
hidYobi	6205VV
Da max.	47 mm
da min.	30 mm
ra max.	1 mm
GRS rpm	13000
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Inventory	0.0
Enclosure	2 Seals
Snap Ring	No
Size (mm)	25x52x15
Width (mm)	15
Prod_Type3	DGBB_SR_VV
Weight / LBS	0.128
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	6205VV
Keyword String	Ball
Enclosure Type	Non-Contact Seal
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.591 Inch 15 Millimeter
Outside Diameter	2.047 Inch 52

	Millimeter
Long Description	25MM Bore; 52MM Outside Diameter; 15MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Weight / Kilogram	0.06
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	25
Outer Diameter (mm)	52
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6205VV
Internal Special Features	No
(Grease) Lubrication Speed	13 000 r/min
Basic static load rating (C0)	7,85 kN
Basic dynamic load rating (C)	14 kN
Maximum Capacity / Filling Slot	No