


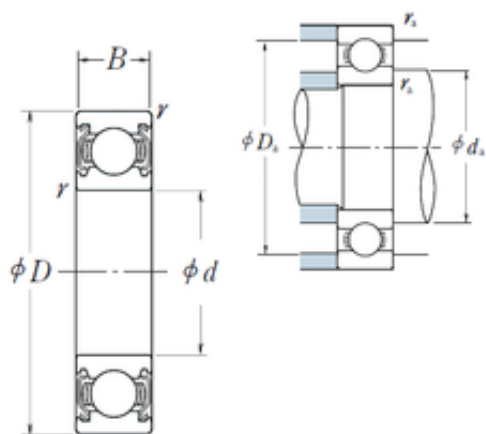

Bearing No. 6205ZZ

D	52 mm
d	25 mm
B	15 mm
C	15 mm
r	1
Z_	9
D_	52
B_	15
ra	1
C0	7.85
fo	13.9
DI_	31.062
SRI	4.01
SRE	4.21
D_a	47
DA_	7.938
DE_	46.938
SRIN	0
Noun	Bearing
SBRG	2
yobi	6205ZZ
SDM_	39
KBRG	6141
SREX	0.04
bomp	0
mass	0.129
Bore	0.984 Inch 25 Millimeter
SRIX	0.02
SREN	0

LangID	1
da min	30
r min.	1 mm
da max	32 mm
ALPHA_	0
C_conv	14000
UNSPSC	31171504
Weight	0,129 Kg
ra max.	1 mm
hidYobi	6205ZZ
series:	62
da min.	30 mm
GRS rpm	13000
Da max.	47 mm
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Inventory	40.0
Enclosure	2 Metal Shields
Size (mm)	25x52x15
Snap Ring	No
Prod_Type3	DGBB_SR_ZZ
Width (mm)	15
bore type:	Round
Weight / LBS	0.23
maximum rpm:	15000 RPM
closure type:	Double Shielded
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	6205ZZ
Keyword String	Ball
fillet radius:	1 mm

cage material:	Steel
overall width:	15 mm
bore diameter:	25 mm
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Rolling Element	Ball Bearing
Manufacturer URL	http://www.nskamericas.com
Long Description	25MM Bore; 52MM Outside Diameter; 15MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outside Diameter	2.047 Inch 52 Millimeter
Outer Race Width	0.591 Inch 15 Millimeter
Manufacturer Name	NSK
Weight / Kilogram	0.129
outside diameter:	52 mm
outer ring width:	15 mm
precision rating:	Not Rated
Internal Clearance	C0-Medium
Bore Diameter (mm)	25
internal clearance:	C0
Outer Diameter (mm)	52
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
static load capacity:	7850 N
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	14000 N
Manufacturer Item	6205ZZ

Number	
Internal Special Features	No
(Grease) Lubrication Speed	13 000 r/min
operating temperature range:	-10 to +110 °C
Basic static load rating (C0)	7,85 kN
Basic dynamic load rating (C)	14 kN
Maximum Capacity / Filling Slot	No