


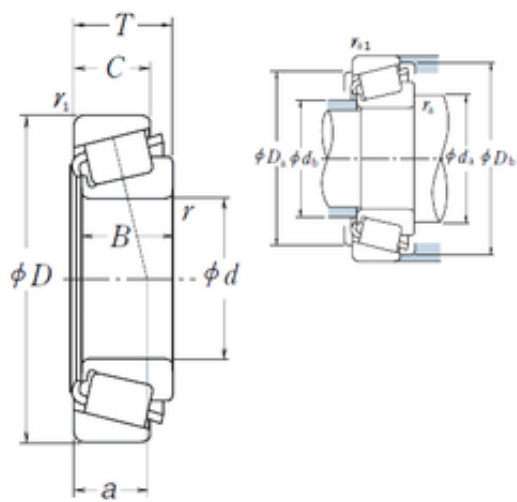

Bearing No. 67790/67720

e	0.44
d	177,8 mm
D	247,65 mm
T	47,625 mm
B	47,625 mm
C	38,1 mm
a	52,4 mm
Da	229 mm
B_	47.625
Db	240 mm
da	194 mm
Y0	0.75
db	188 mm
C0	705
D_	247.65
Z_	36
C_	38.1
Y1	1.4
DE_	226.483
SLR	33
D_a	229
DI_	197.021
DA1	15.847
DA2	14.602
CUP	2.33
DA_	15.234
D_b	240
RAr	419.101
SDM_	211.898
KBRG	3161

yobi	67790/67720
CONE	4.56
ALP21	32
ALP22	40
ALP23	0
BETA_	1
BET21	2
BET23	0
BET22	10
r min.	3,5 mm
LangID	1
Weight	6,89 Kg
ALPHA_	16.333
r1 min.	3,3 mm
ra max.	3,5 mm
Oil rpm	1700
outer r	3.3
hidYobi	67790/67720
GRS rpm	1300
inner r	3.5
hidTable	ecat_NSTPRI
inner ra	3.5
outer rb	3.3
ra1 max.	3,3 mm
Size (mm)	177.8x247.65x47.625
SHOG_yobi	67790/67720
Prod_Type3	TRBSR_ID_A
Width (mm)	47,625
Bearing number	67790/67720
Bore Diameter (mm)	177,8
Outer Diameter (mm)	247,65
Calculation factor (e)	0,44

(Oil) Lubrication Speed	1700 r/min
Calculation factor (Y0)	0,75
(Grease) Lubrication Speed	1300 r/min
Basic static load rating (C0)	705 kN
Basic dynamic load rating (C)	345 kN