


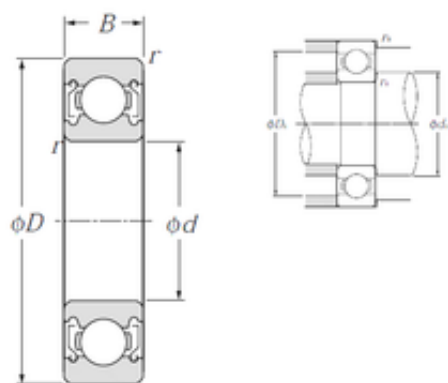

Bearing No. 6205ZZ

D	52 mm
d	25 mm
B	15 mm
C	15 mm
rn	0,5 mm
Bore	0.984 Inch 25 Millimeter
Noun	Bearing
da max	32 mm
UNSPSC	31171504
Weight	0,128 Kg
r min.	1 mm
ra max.	1 mm
da min.	30 mm
Da max.	47 mm
Category	Single Row Ball Bearing
Size (mm)	25x52x15
Snap Ring	No
Inventory	2.0
Enclosure	2 Metal Shields
Width (mm)	15
bore type:	Round
Weight / LBS	0.28
Inch - Metric	Metric
closure type:	Double Shielded
Product Group	B00308
Cage Material	Steel
bore diameter:	25 mm
Keyword String	Ball
overall width:	15 mm

cage material:	Steel
fillet radius:	1 mm
Other Features	Deep Groove
Bearing number	6205ZZ
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Manufacturer URL	http://www.ntnamerica.com
Outer Race Width	0.591 Inch 15 Millimeter
Outside Diameter	2.047 Inch 52 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Long Description	25MM Bore; 52MM Outside Diameter; 15MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel
precision rating:	ISO Class 0
outside diameter:	52 mm
outer ring width:	15 mm
inner ring width:	15 mm
bearing material:	High Carbon Chrome Steel
Weight / Kilogram	0.13
Manufacturer Name	NTN
Bore Diameter (mm)	25
Internal Clearance	C0-Medium
Outer Diameter (mm)	52
internal clearance:	CN

snap ring included:	Without Snap Ring
Minimum Buy Quantity	N/A
static load capacity:	7850 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	13000 rpm
dynamic load capacity:	14000 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6205ZZ
Internal Special Features	No
manufacturer product page:	Click here
(Grease) Lubrication Speed	13 000 r/min
operating temperature range:	-40 to 120 °C
Basic dynamic load rating (C)	14 kN
Basic static load rating (C0)	7,85 kN
Maximum Capacity / Filling Slot	No