


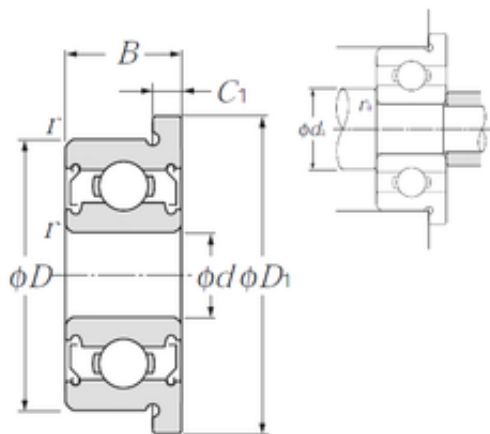

Bearing No. FL698ZZ

D	19 mm
d	8 mm
B	6 mm
C	6 mm
D1	22 mm
C1	1,5 mm
Noun	Bearing
Bore	0.315 Inch 8 Millimeter
da max	10,6 mm
UNSPSC	31171504
r min.	0,3 mm
Weight	8,4 Kg
ra max.	0,3 mm
series:	FL
Da max.	17 mm
da min.	10 mm
Category	Single Row Ball Bearing
Snap Ring	No
Inventory	26.0
Size (mm)	8x22x6
Enclosure	2 Metal Shields
bore type:	Round
Width (mm)	6
Weight / LBS	0.019
maximum rpm:	39000 RPM
closure type:	Double Shielded
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Bearing number	FL698ZZ

Keyword String	Ball
fillet radius:	0.3 mm
overall width:	6 mm
bore diameter:	8 mm
Other Features	Flanged Outer Ring
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Rolling Element	Ball Bearing
Outside Diameter	0.748 Inch 19 Millimeter
Outer Race Width	0.236 Inch 6 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Manufacturer URL	http://www.ntnamerica.com
Long Description	8MM Bore; 19MM Outside Diameter; 6MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel
outer ring width:	6 mm
bearing material:	Stainless Steel
Weight / Kilogram	0.008
outside diameter:	19 mm
precision rating:	Not Rated
Manufacturer Name	NTN
Internal Clearance	C0-Medium
Bore Diameter (mm)	8
Outer Diameter (mm)	22
internal clearance:	C0
Minimum Buy Quantity	N/A
static load capacity:	1.5 kN

row type & fill slot:	Single Row Non-Fill Slot
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	22 kN
Manufacturer Item Number	FL698ZZ
Internal Special Features	No
(Grease) Lubrication Speed	33 000 r/min
Basic static load rating (C0)	0,865 kN
Basic dynamic load rating (C)	1,99 kN
Maximum Capacity / Filling Slot	No